


Lecture 25: Networking (cont'd)


CS 105

April 24, 2019


OSI Model

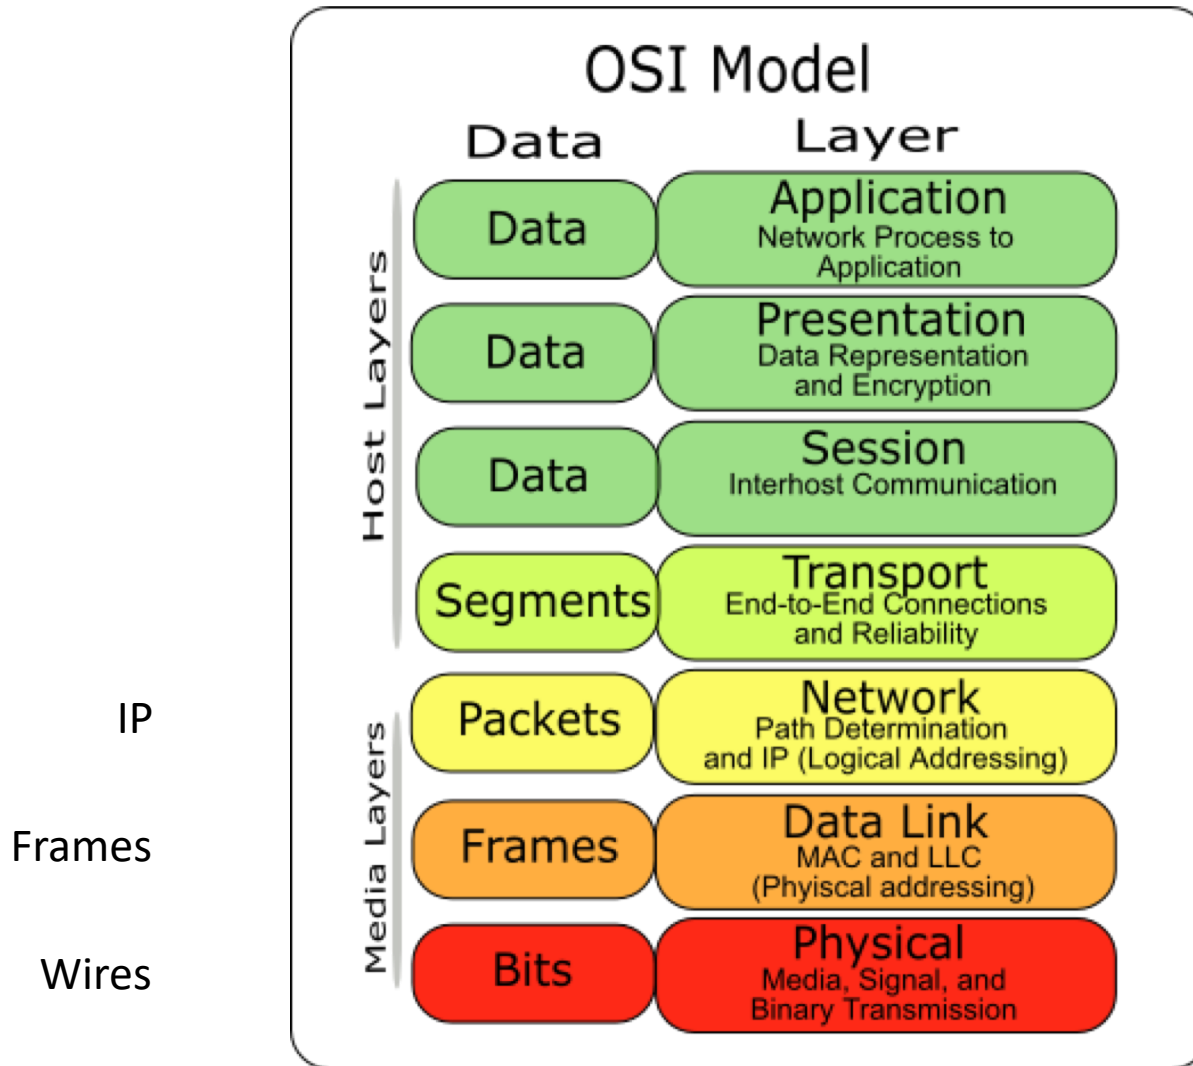

The Big Picture

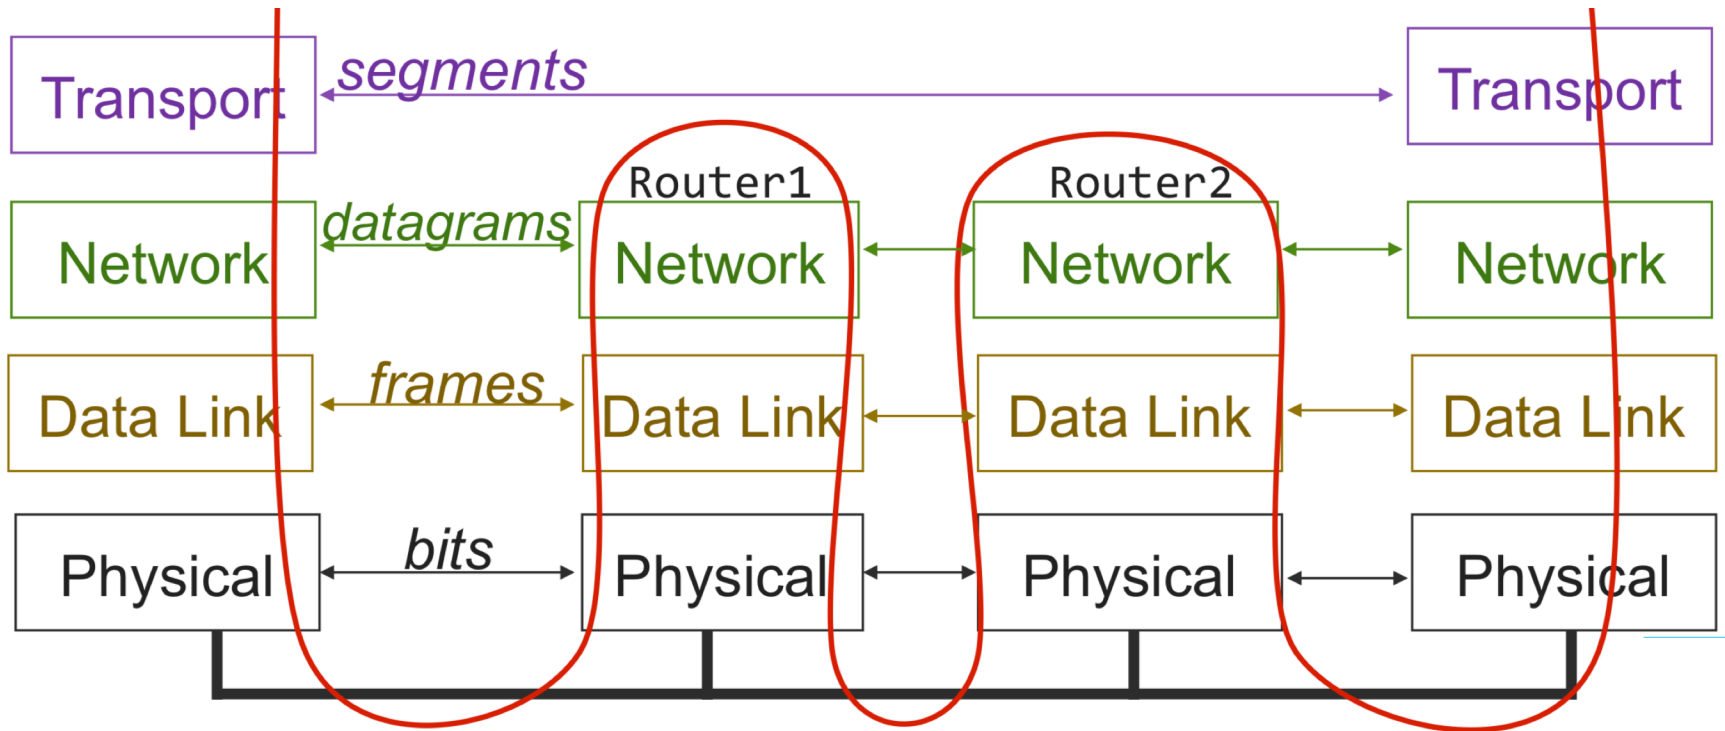

Continuing up the Network Stack...

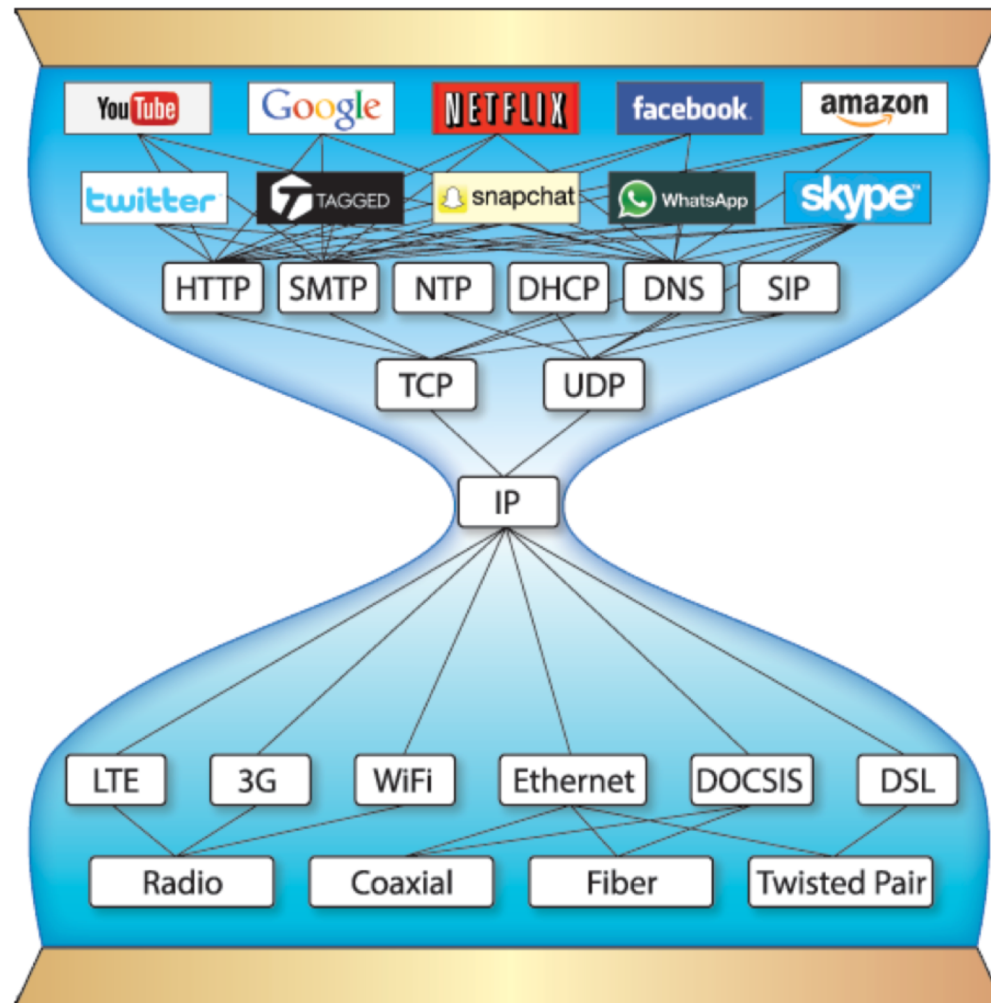


Domain Name System (DNS)

- Principals are identified by names
 - for web hosts, typically a domain name
 - e.g., www.cs.pomona.edu
- Internet hosts are identified by IP addresses
 - used by network layer to route packets between hosts
- The role of DNS is to translate between domain names and IP addresses



Domain Name System (DNS)

- Distributed, hierarchical database
- Application-level protocol: hosts and DNS servers communicate to resolve names
- Names are separated into components by dots
- lookup occurs top down

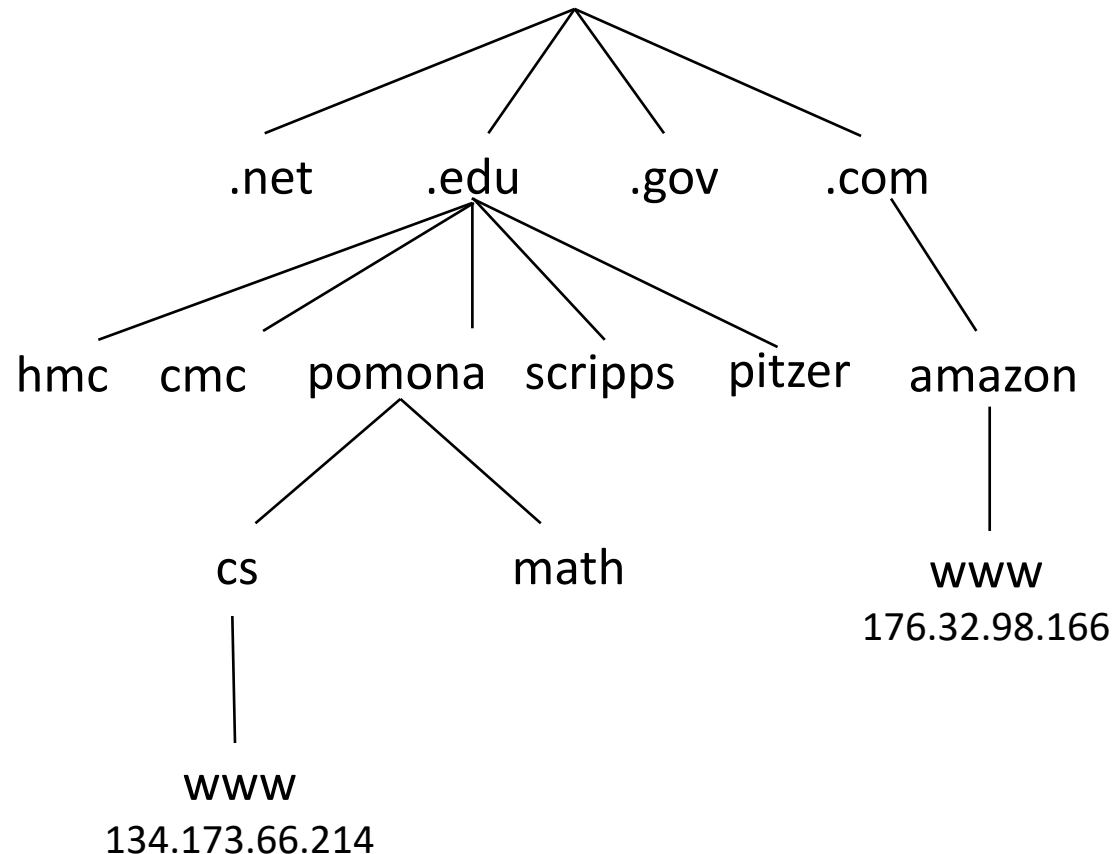


DNS Lookup

- the client asks its local nameserver
- the local nameserver asks one of the *root nameservers*

DNS Root Name Servers

- contacted by local name server that can't resolve name
- owned by Internet Corporation for Assigned Names & Numbers (ICANN)
- contacts authoritative name server if name mapping not known, gets mapping
- returns mapping to local name server


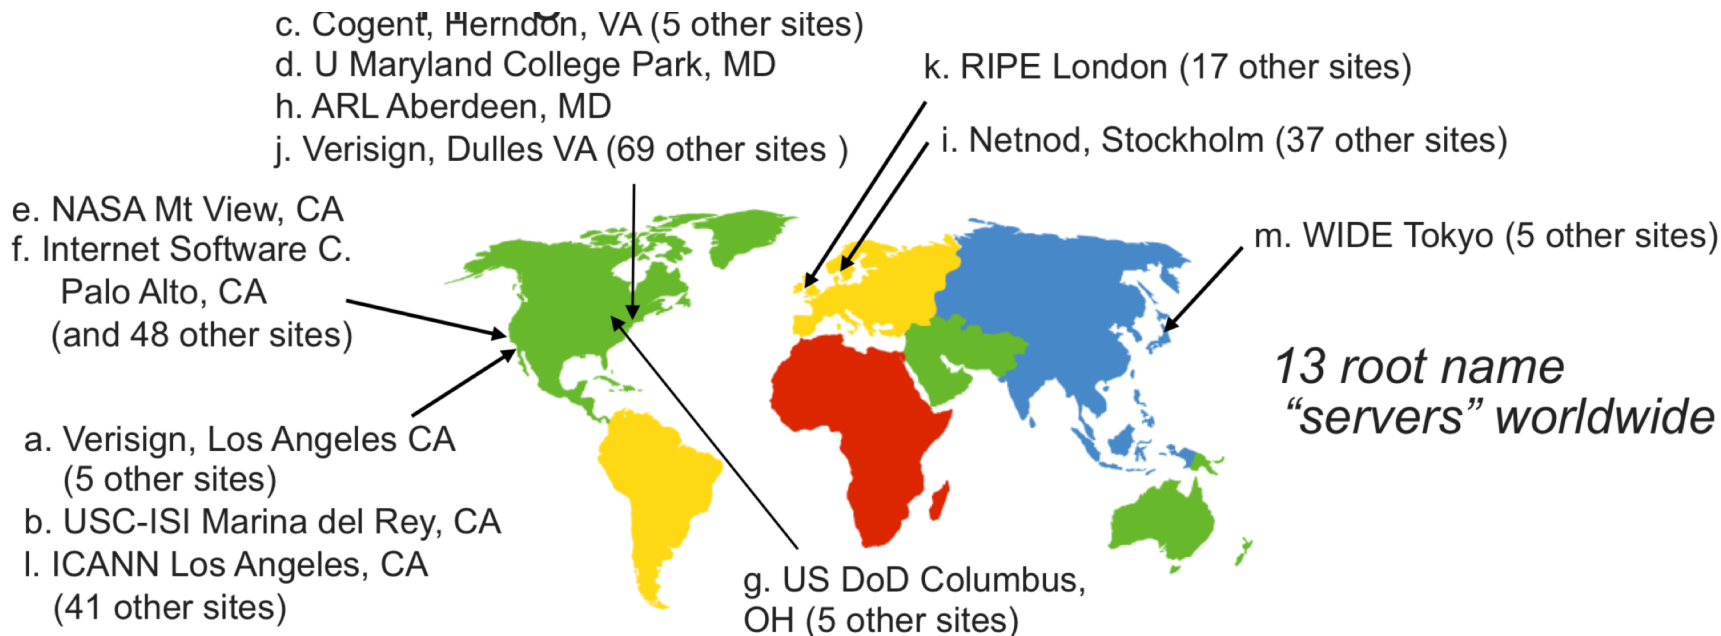


DNS Lookup

- the client asks its local nameserver
 - the local nameserver asks one of the *root nameservers*
 - the root nameserver replies with the address of the authoritative nameserver
 - the server then queries that nameserver
 - repeat until host is reached, cache result.
-
- Example: Client wants IP addr of `www.amazon.com`
 1. Queries root server to find `com` DNS server
 2. Queries `.com` DNS server to get `amazon.com` DNS server
 3. Queries `amazon.com` DNS server to get IP address for `www.amazon.com`

Web Server Basics

- Clients and servers communicate using the HyperText Transfer Protocol (HTTP)
 - Client and server establish TCP connection
 - Client requests content
 - Server responds with requested content
 - Client and server close connection (eventually)
- Current version is HTTP/2.0
 - RFC 7540, 2015
 - Includes protocol negotiation
 - HTTP/1.1 still in use (RFC 2616, 1999)

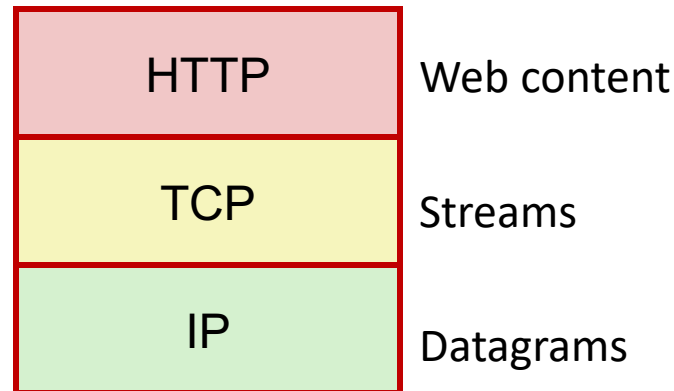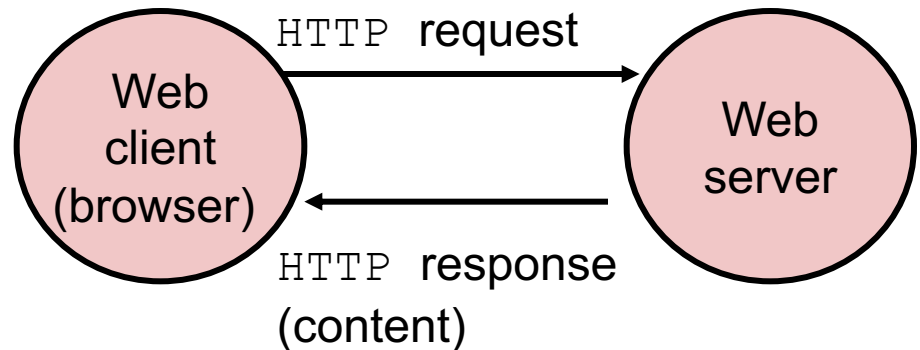

Web Content

- Web servers return *content* to clients
 - *content*: a sequence of bytes with an associated MIME (Multipurpose Internet Mail Extensions) type
- Example MIME types
 - `text/html` HTML document
 - `text/plain` Unformatted text
 - `image/gif` Binary image encoded in GIF format
 - `image/png` Binary image encoded in PNG format
 - `image/jpeg` Binary image encoded in JPEG format

You can find the complete list of MIME types at:

<http://www.iana.org/assignments/media-types/media-types.xhtml>

Static and Dynamic Content

- The content returned in HTTP responses can be either *static* or *dynamic*
 - *Static content*: content stored in files and retrieved in response to an HTTP request
 - Examples: HTML files, images, audio clips
 - Request identifies which content file
 - *Dynamic content*: content produced on-the-fly in response to an HTTP request
 - Example: content produced by a program executed by the server on behalf of the client
 - Request identifies file containing executable code
- Bottom line: *Web content is associated with a file that is managed by the server*

URLs

- Unique name for a file: URL (Universal Resource Locator)
- Example URL:
<http://www.cs.pomona.edu:80/~ebirrell/classes/cs105/2019sp/index.html>
- Clients use *prefix* (`http://www.cs.pomona.edu:80`) to infer:
 - What kind (protocol) of server to contact (HTTP)
 - Where the server is (`www.cs.pomona.edu`)
 - What port it is listening on (80)
- Servers use *suffix* (`/~ebirrell/classes/cs105/2019sp/index.html`) to:
 - Determine if request is for static or dynamic content.
 - No hard and fast rules for this
 - One convention: executables reside in `cgi-bin` directory
 - Find file on file system
 - Initial “/” in suffix denotes home directory for requested content.
 - Minimal suffix is “/”, which server expands to configured default filename (usually, `index.html`)

HTTP Requests

- HTTP request is a *request line*, followed by zero or more *request headers*
- **Request line:** `<method> <uri> <version>`
 - `<method>` is one of GET, POST, OPTIONS, HEAD, PUT, DELETE, or TRACE
 - `<uri>` is typically URL for proxies, URL suffix for servers
 - A URL is a type of URI (Uniform Resource Identifier)
 - See <http://www.ietf.org/rfc/rfc2396.txt>
 - `<version>` is HTTP version of request (HTTP/1.0 or HTTP/1.1)
- **Request headers:** `<header name>: <header data>`
 - Provide additional information to the server

HTTP Responses

- HTTP response is a *response line* followed by zero or more *response headers*, possibly followed by *content*, with blank line (“\r\n”) separating headers from content.
- Response line:
 - `<version> <status code> <status msg>`
 - `<version>` is HTTP version of the response
 - `<status code>` is numeric status
 - `<status msg>` is corresponding English text
 - 200 OK Request was handled without error
 - 301 Moved Provide alternate URL
 - 404 Not found Server couldn't find the file
- Response headers: `<header name>: <header data>`
 - Provide additional information about response
 - Content-Type: MIME type of content in response body
 - Content-Length: Length of content in response body

Tiny Web Server

- Tiny Web server described in text
 - Tiny is a sequential Web server
 - Serves static and dynamic content to real browsers
 - text files, HTML files, GIF, PNG, and JPEG images
 - 239 lines of commented C code
 - Not as complete or robust as a real Web server
 - You can break it with poorly-formed HTTP requests (e.g., terminate lines with “\n” instead of “\r\n”)

Tiny Operation

- Accept connection from client
- Read request from client (via connected socket)
- Split into `<method> <uri> <version>`
 - If method not GET, then return error
- If URI contains `"cgi-bin"` then serve dynamic content
 - (Would do wrong thing if had file `"abcgi-bingo.html"`)
 - Fork process to execute program
- Otherwise serve static content
 - Copy file to output

Tiny Serving Static Content

```
void serve_static(int fd, char *filename, int filesize)
{
    int srcfd;
    char *srcp, filetype[MAXLINE], buf[MAXBUF];

    /* Send response headers to client */
    get_filetype(filename, filetype);
    sprintf(buf, "HTTP/1.0 200 OK\r\n");
    sprintf(buf, "%sServer: Tiny Web Server\r\n", buf);
    sprintf(buf, "%sConnection: close\r\n", buf);
    sprintf(buf, "%sContent-length: %d\r\n", buf, filesize);
    sprintf(buf, "%sContent-type: %s\r\n\r\n", buf, filetype);
    Rio_writen(fd, buf, strlen(buf));


    /* Send response body to client */
    srcfd = Open(filename, O_RDONLY, 0);
    srcp = Mmap(0, filesize, PROT_READ, MAP_PRIVATE, srcfd, 0);
    Close(srcfd);
    Rio_writen(fd, srcp, filesize);
    Munmap(srcp, filesize);
}
```

tiny.c

Serving Dynamic Content


- Client sends request to server
- If request URI contains the string “/cgi-bin”, the Tiny server assumes that the request is for dynamic content

```
GET /cgi-bin/env.pl HTTP/1.1
```

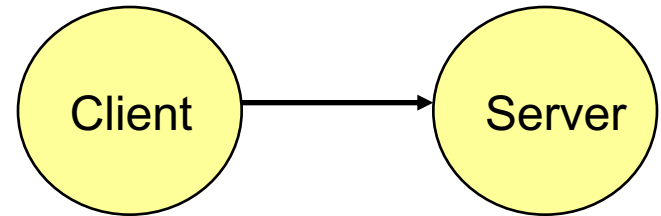


Serving Dynamic Content (cont)

- The server creates a child process and runs the program identified by the URI in that process

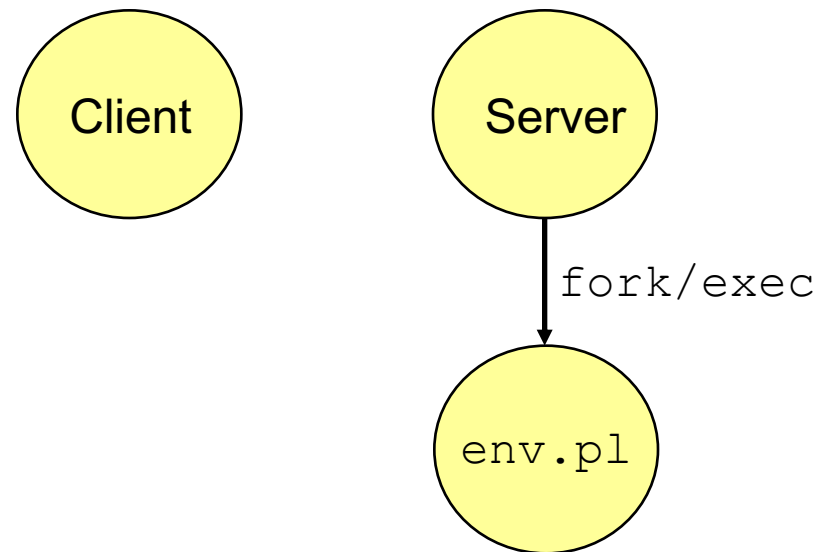


Serving Dynamic Content (cont)

- The child runs and generates the dynamic content
- The server captures the content of the child and forwards it without modification to the client

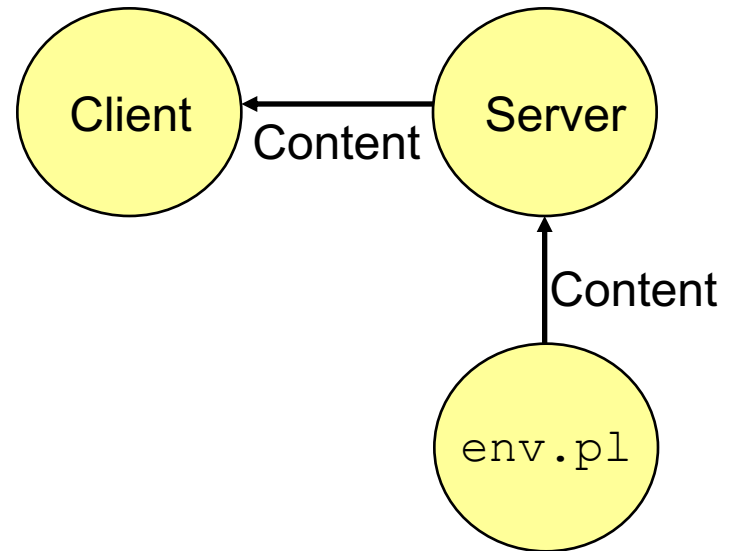

Issues in Serving Dynamic Content


- How does the client pass program arguments to the server?
- How does the server pass these arguments to the child?
- How does the server pass other info relevant to the request to the child?
- How does the server capture the content produced by the child?
- These issues are addressed by the **Common Gateway Interface (CGI)** specification.

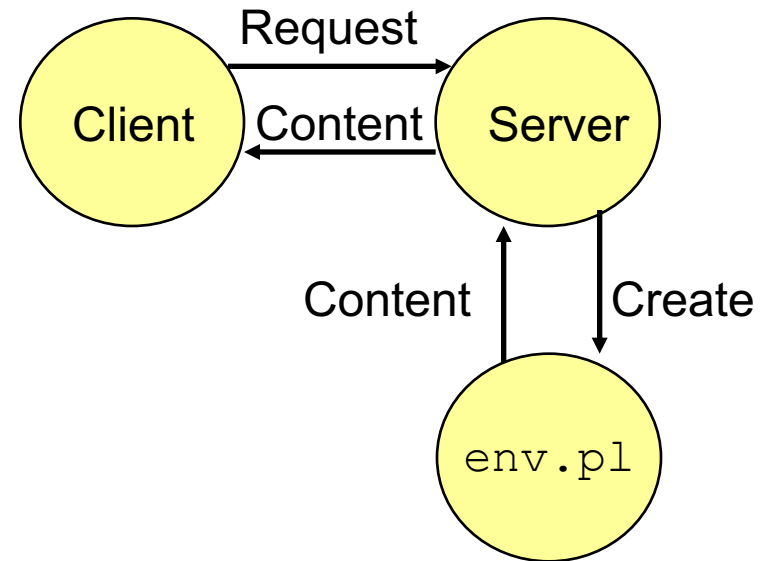

CGI

- Because the children are written according to the CGI spec, they are often called *CGI programs*.
- However, CGI really defines a simple standard for transferring information between the client (browser), the server, and the child process.
- CGI is the original standard for generating dynamic content. Has been largely replaced by other, faster techniques:
 - E.g., fastCGI, Apache modules, Java servlets, Rails controllers
 - Avoid having to create process on the fly (expensive and slow).

The add.com Experience

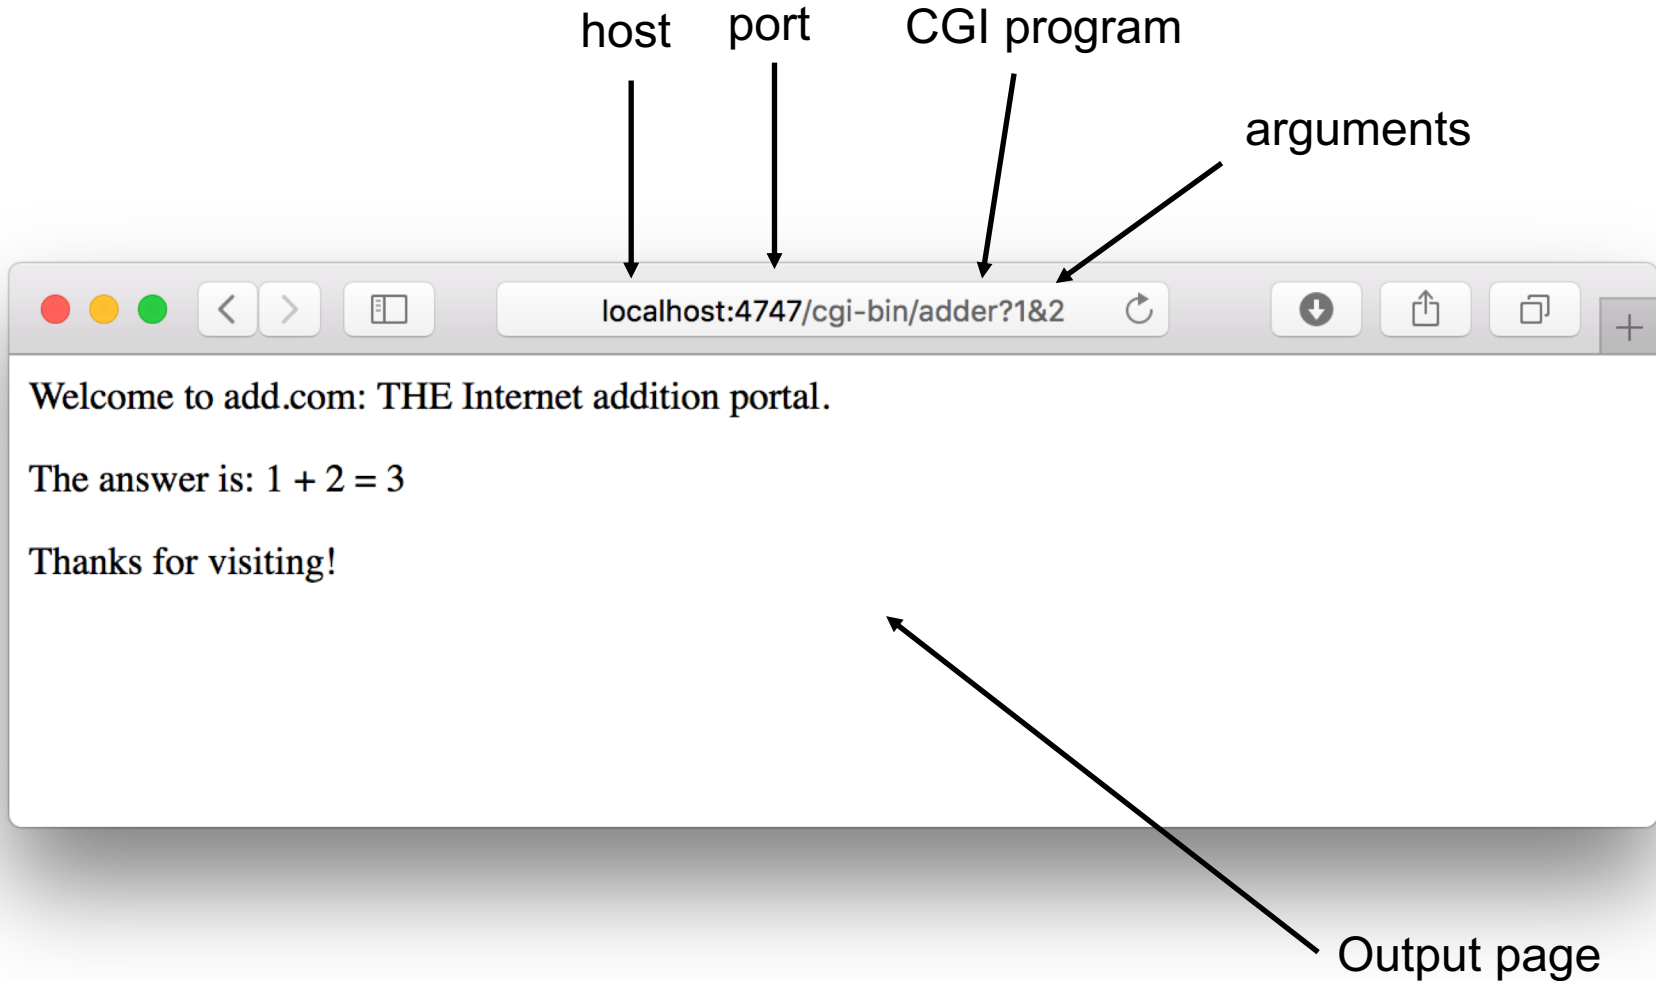

Serving Dynamic Content With GET


- Question: How does the client pass arguments to the server?
- Answer: The arguments are appended to the URI
- Can be encoded directly in a URL typed to a browser or a URL in an HTML link
 - `http://add.com/cgi-bin/adder?15213&18213`
 - `adder` is the CGI program on the server that will do the addition.
 - argument list starts with `"?"`
 - arguments separated by `"&"`
 - spaces represented by `"+"` or `"%20"`

Testing Servers Using `telnet`

- The `telnet` program is invaluable for testing servers that transmit ASCII strings over Internet connections
 - Our simple echo server
 - Web servers
 - Mail servers
- Usage:
 - `linux> telnet <host> <portnumber>`
 - Creates a connection with a server running on `<host>` and listening on port `<portnumber>`


Proxies

- A *proxy* is an intermediary between a client and an *origin server*
 - To the client, the proxy acts like a server
 - To the server, the proxy acts like a client

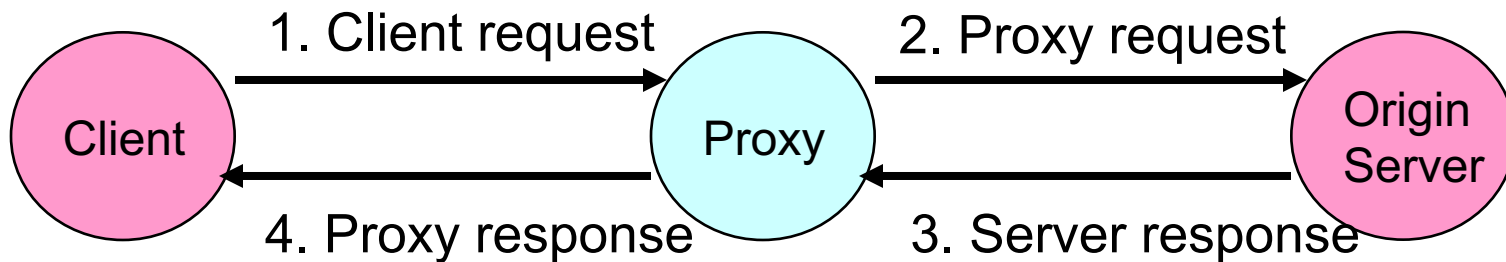


Why Proxies?

- Can perform useful functions as requests and responses pass by
 - Examples: Caching, logging, anonymization, filtering

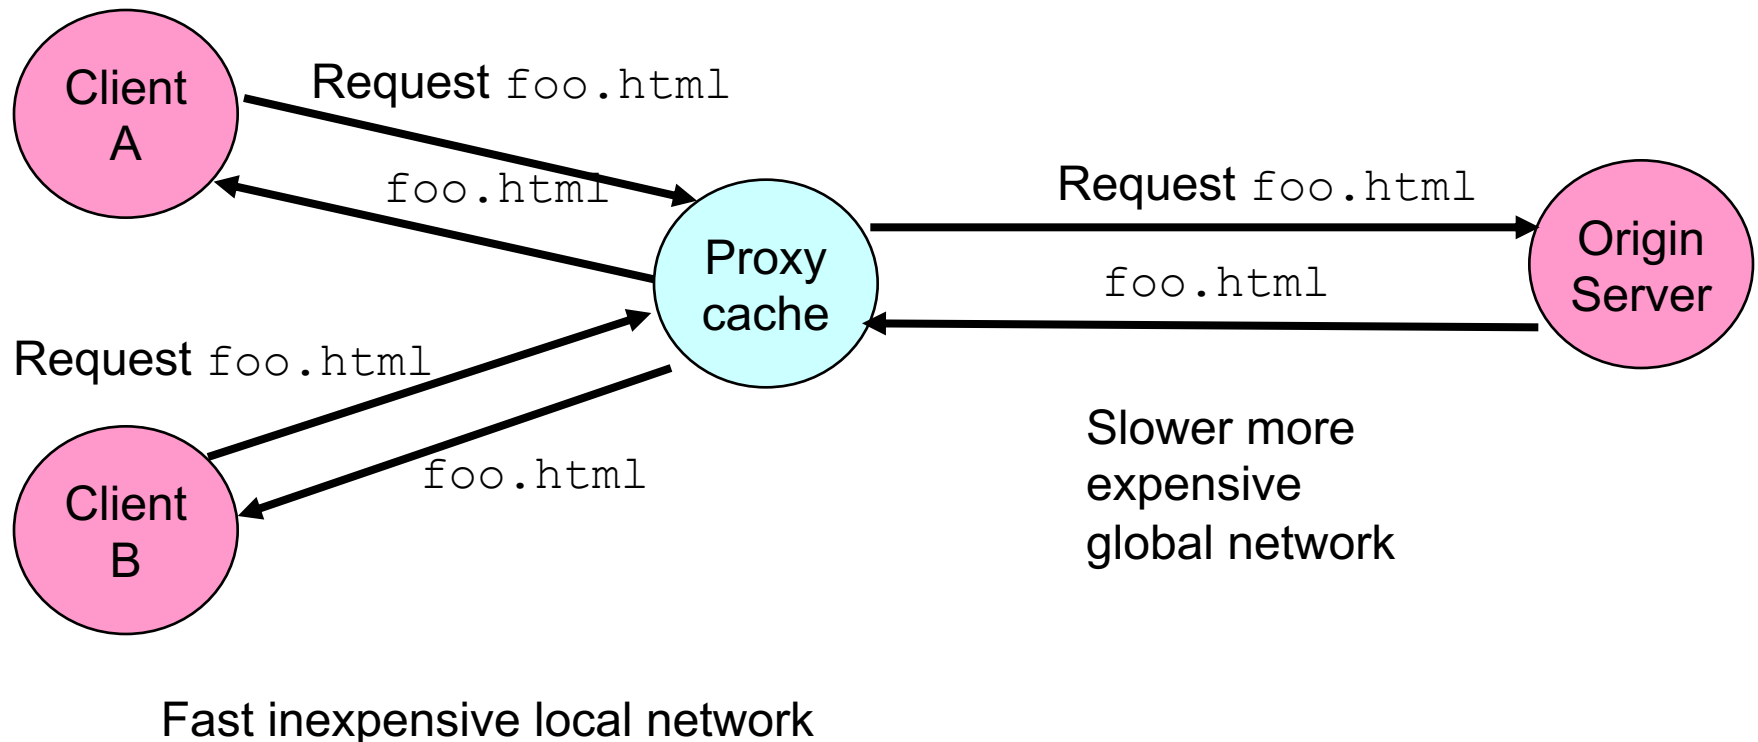

Firewalls

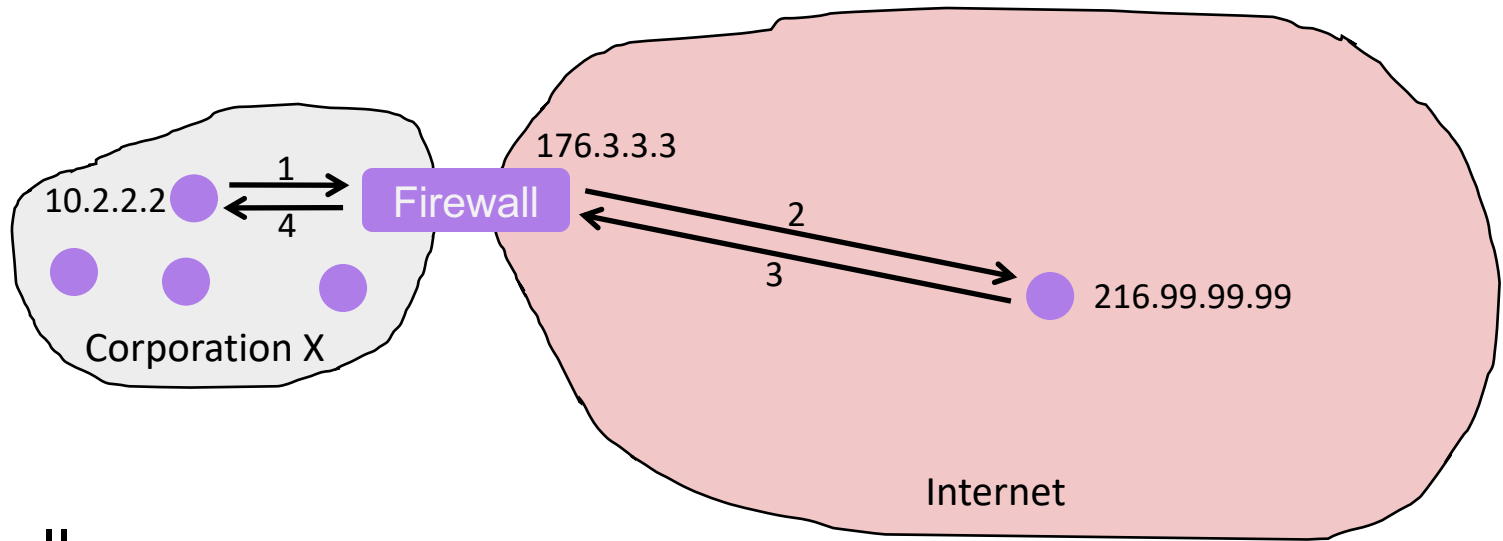

- Firewalls

- Hides organizations nodes from rest of Internet
- Use local IP addresses within organization
- For external service, provides proxy service
 1. Client request: src=10.2.2.2, dest=216.99.99.99
 2. Firewall forwards: src=176.3.3.3, dest=216.99.99.99
 3. Server responds: src=216.99.99.99, dest=176.3.3.3
 4. Firewall forwards response: src=216.99.99.99, dest=10.2.2.2