GRAPHS

CS062

DATA STRUCTURES AND ADVANCED PROGRAMMING

22: Graphs

Alexandra Papoutsaki
she/her/hers

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Some slides adopted from Algorithms 4th Edition or COS226

Why study graphs?

- Thousands of practical applications.
- Hundreds of graph algorithms known.
- Interesting and broadly useful abstraction.
- Challenging branch of theoretical computer science.

Undirected Graphs

- Graph: A set of *vertices* connected pairwise by *edges*.

Protein-protein interaction graph

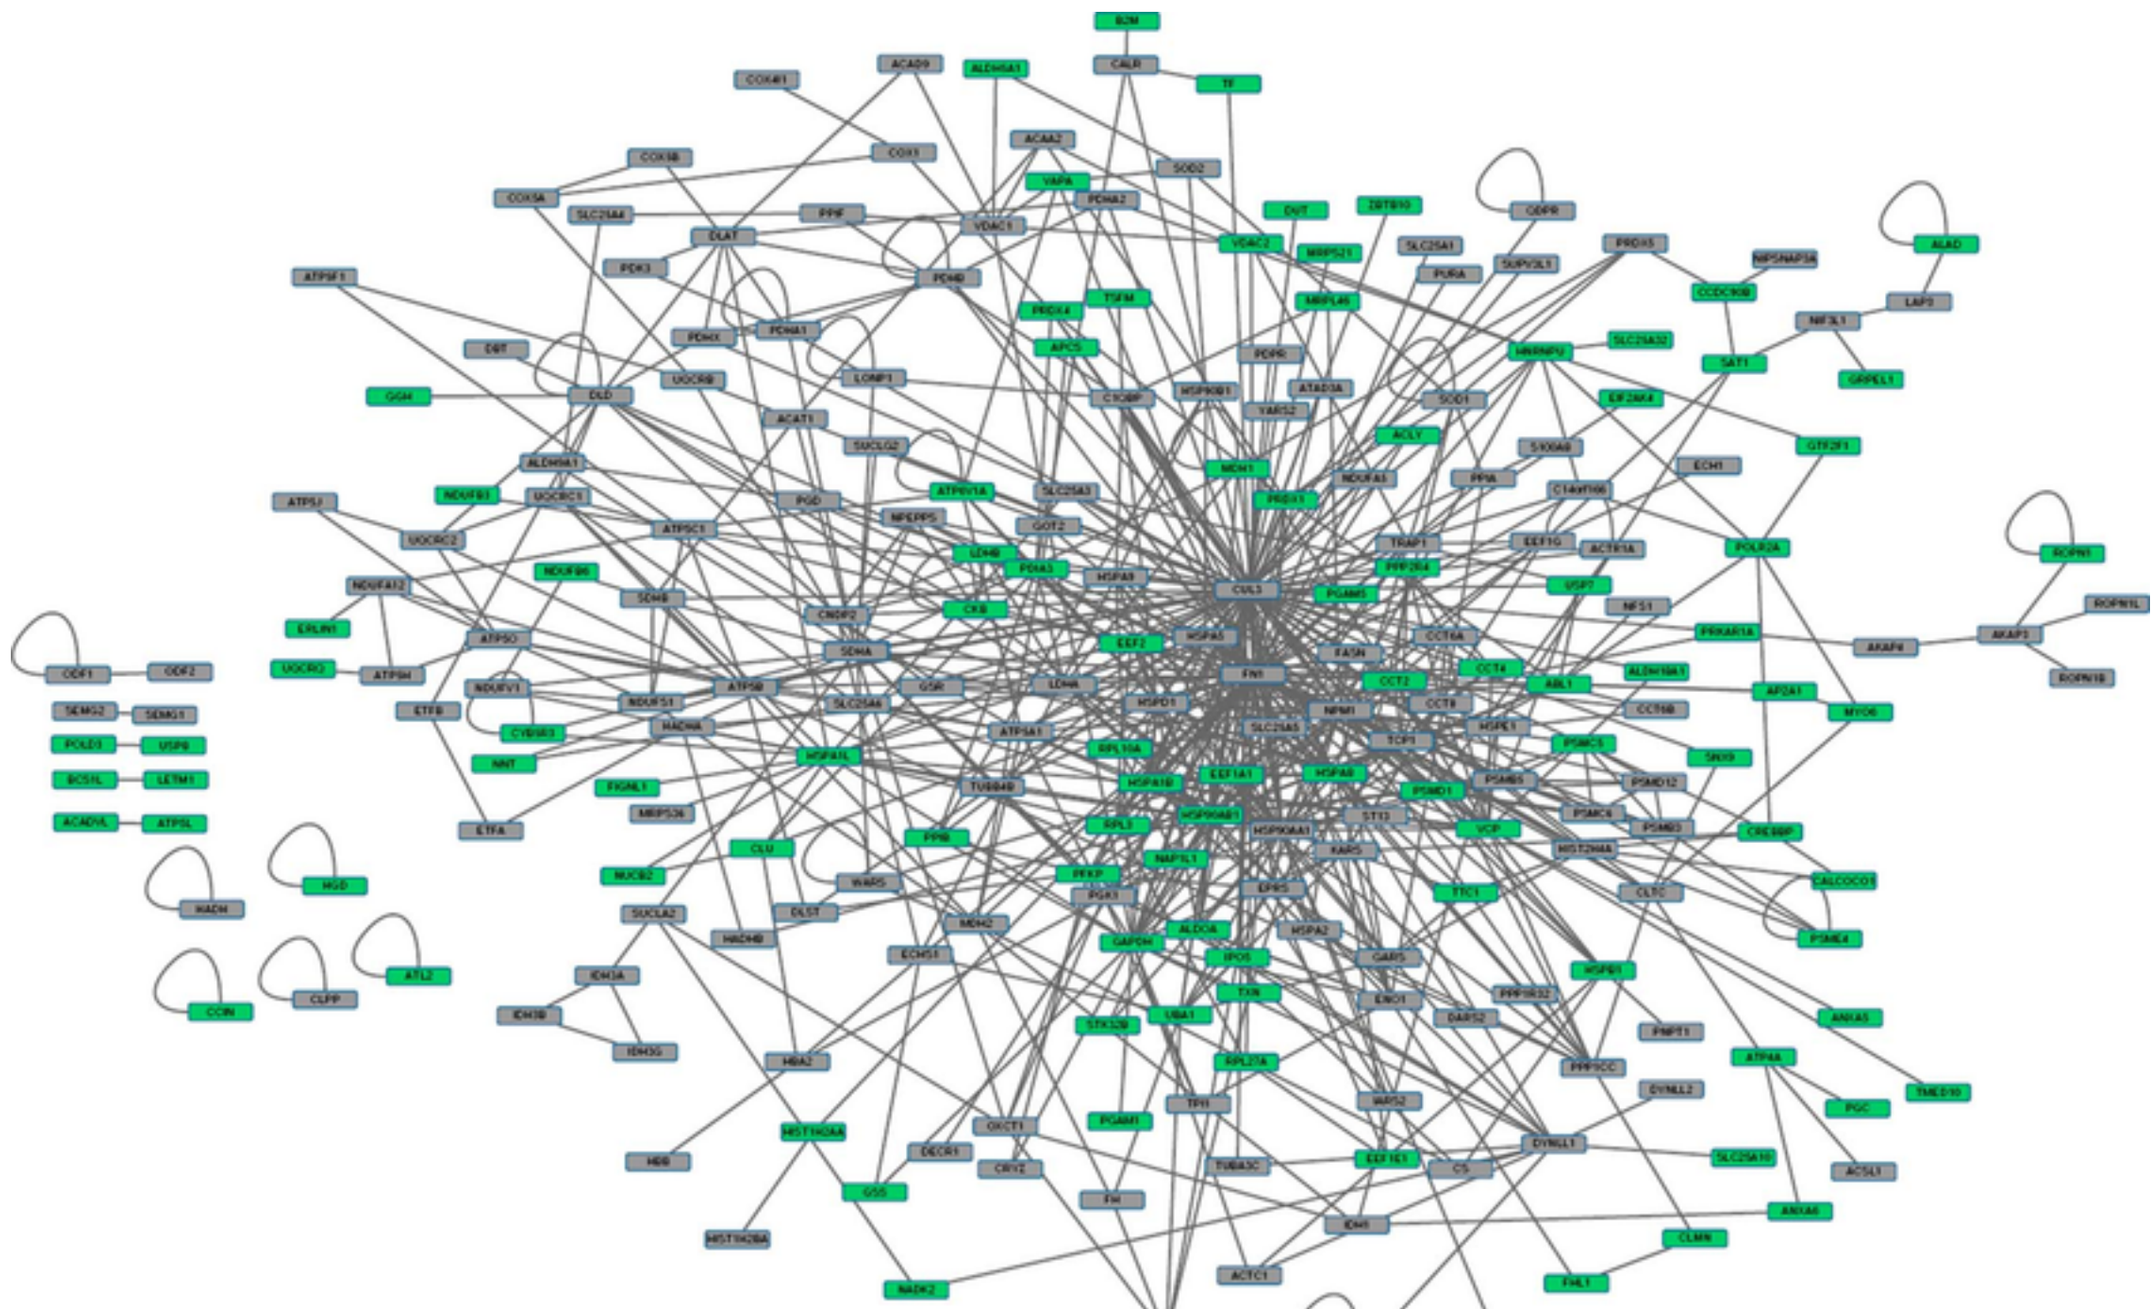

https://www.researchgate.net/figure/Network-graph-of-the-protein-protein-interactions-Green-color-represents-proteins_fig4_272297002

The Internet

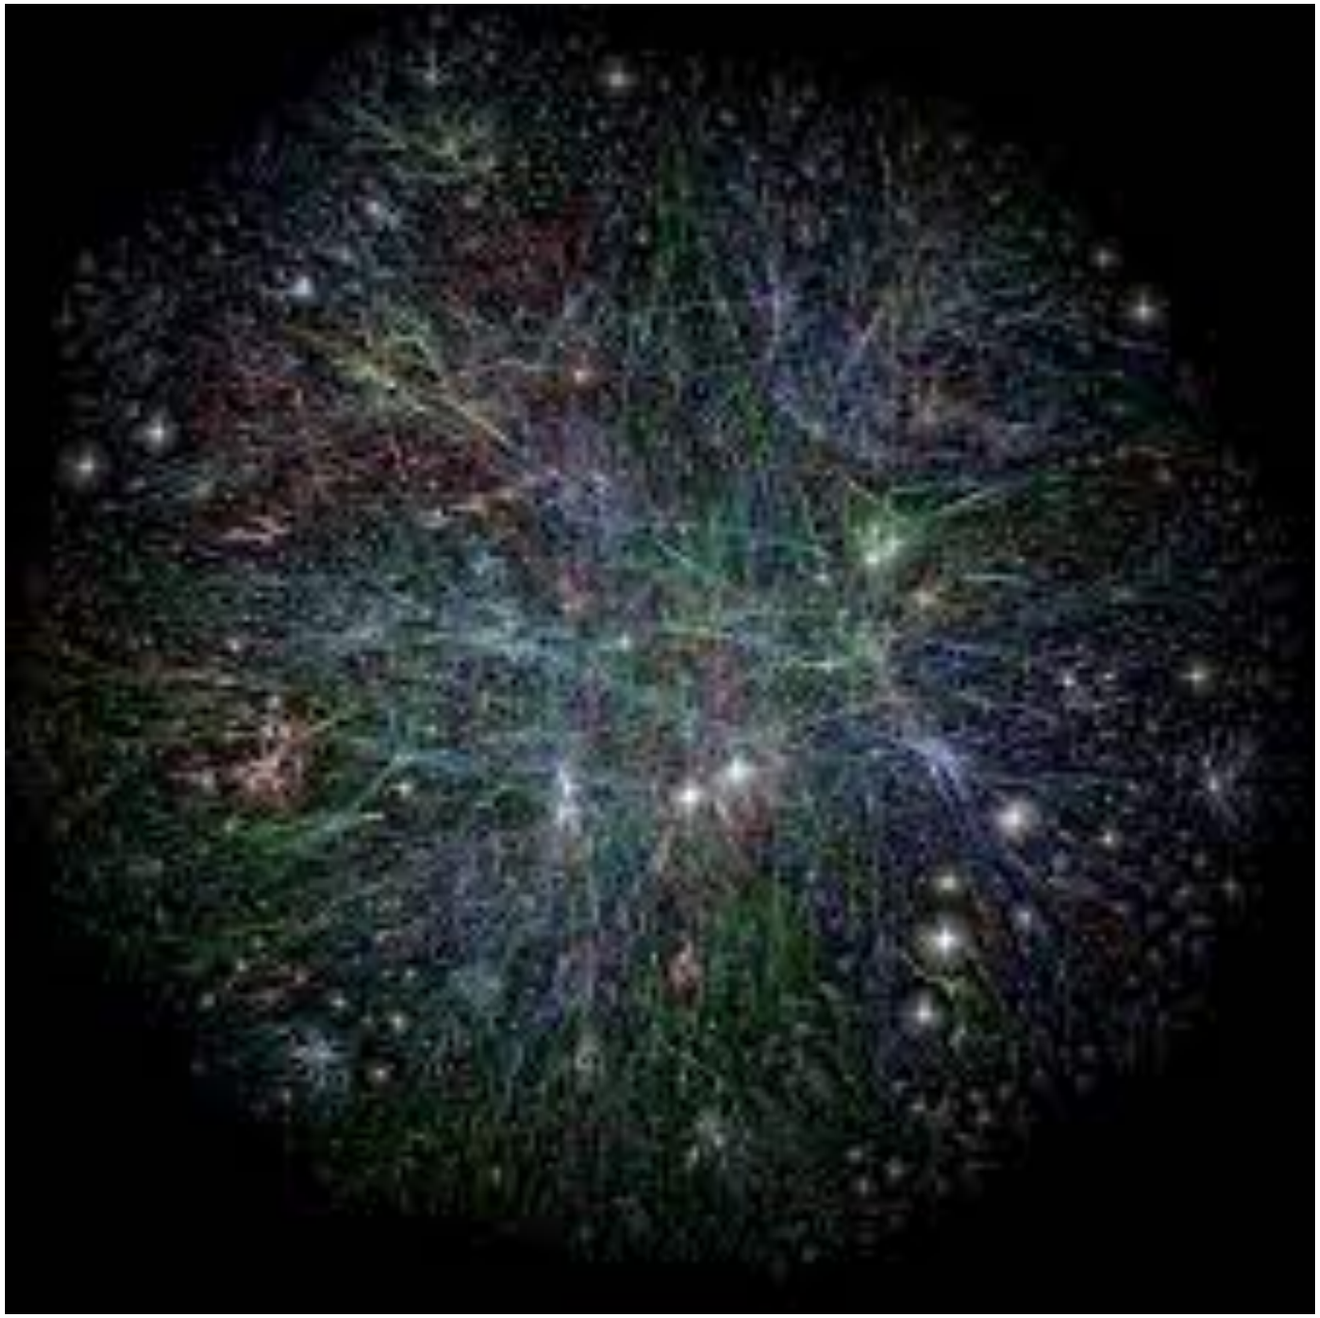

https://www.opte.org/the-internet

Social media

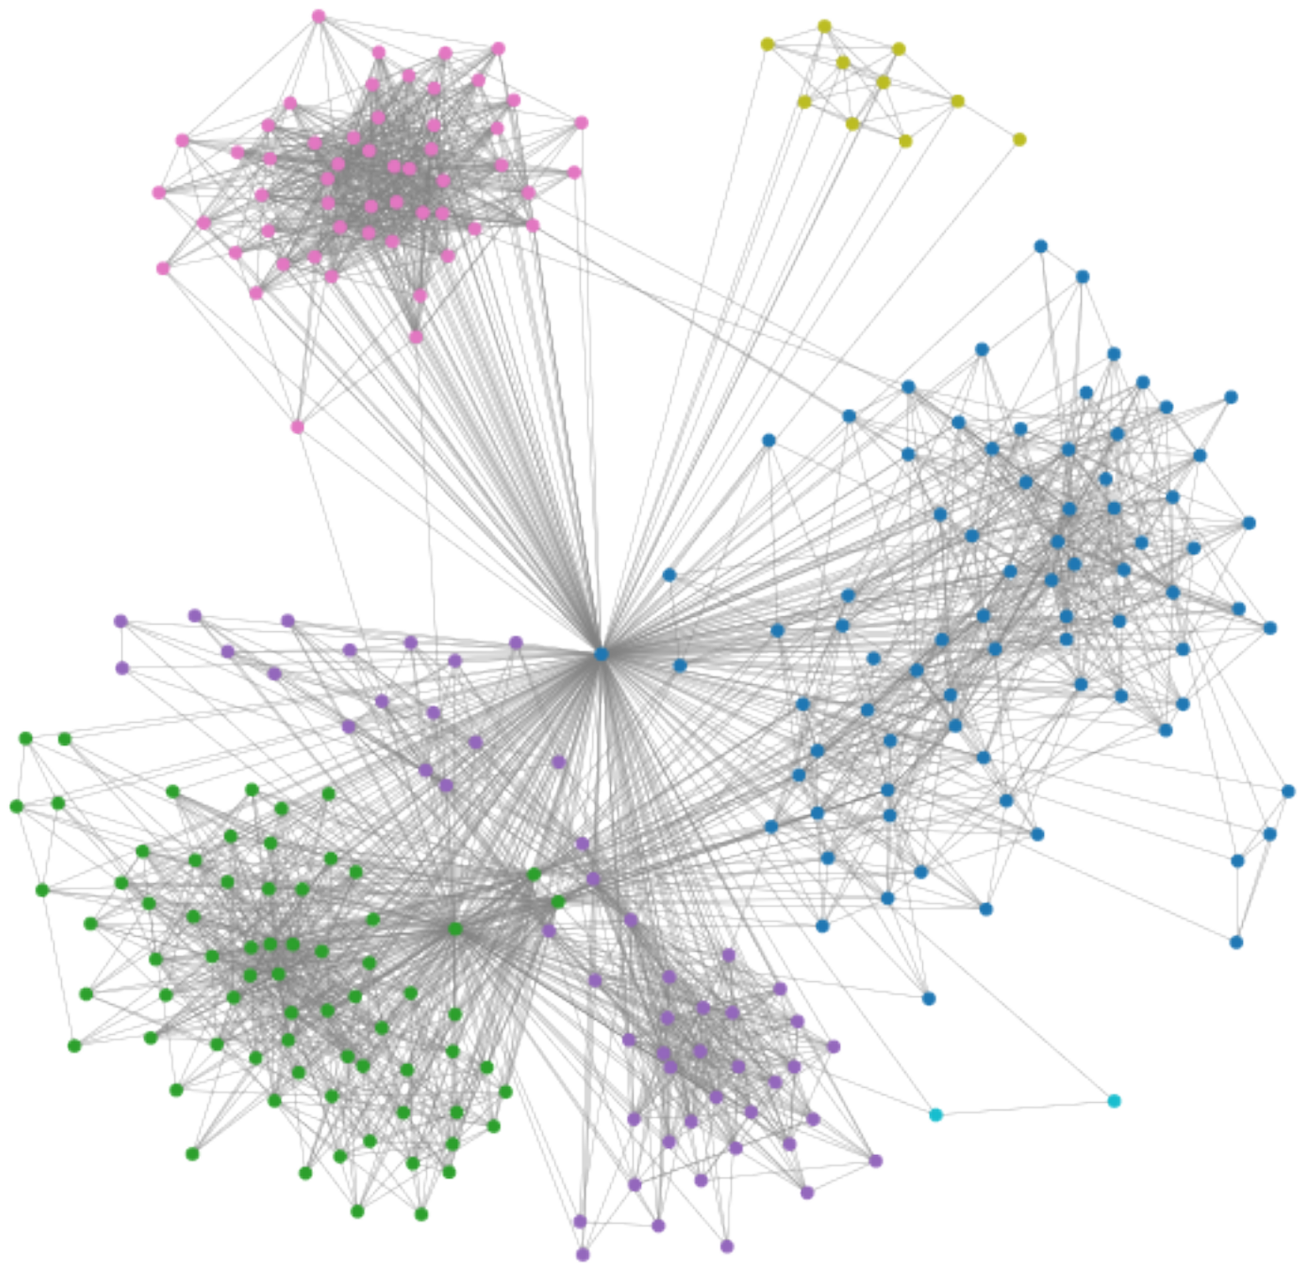

https://www.databentobox.com/2019/07/28/facebook-friend-graph/

Graph terminology

- Path: Sequence of vertices connected by edges
- Cycle: Path whose first and last vertices are the same
- Two vertices are connected if there is a path between them

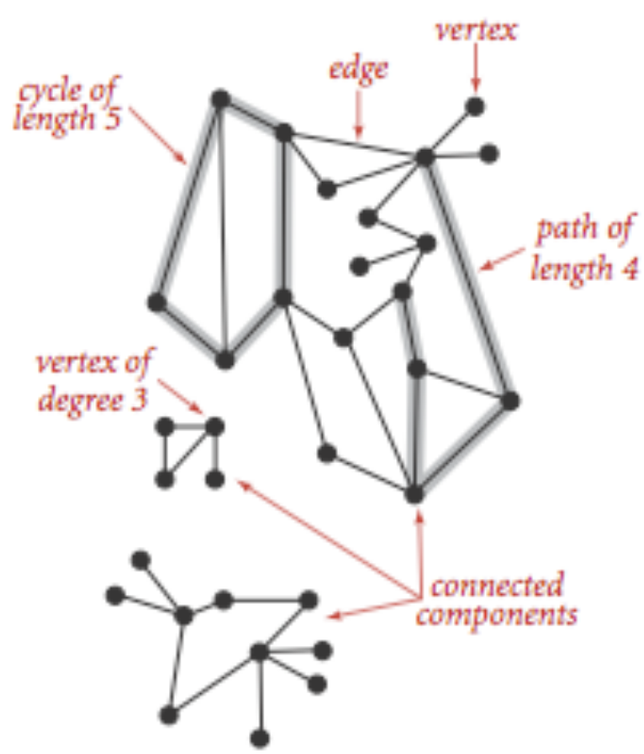

Anatomy of a graph

Examples of graph-processing problems

- Is there a path between vertex s and t?
- What is the shortest path between s and t?
- Is there a cycle in the graph?
- Euler Tour: Is there a cycle that uses each edge exactly once?
- Hamilton Tour: Is there a cycle that uses each vertex exactly once?
- Is there a way to connect all vertices?
- What is the shortest way to connect all vertices?
- Is there a vertex whose removal disconnects the graph?

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Graph representation

- Vertex representation: Here, integers between 0 and V-1.
  - We will use a dictionary to map between names of vertices and integers (indices).

```
0  5
4  3
0  1
9  12
6  4
5  4
0  2
11  12
9  10
0  6
7  8
9  11
5  3
```

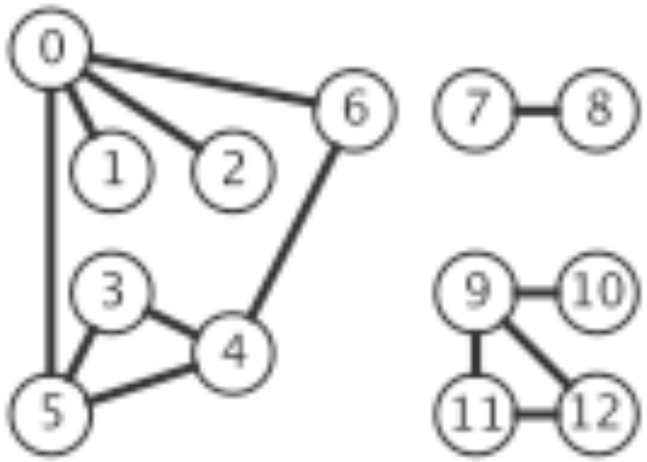

Basic Graph API

- `public class Graph`
  - `Graph(int V)`: create an empty graph with V vertices.
  - `void addEdge(int v, int w)`: add an edge v-w.
  - `Iterable<Integer> adj(int v)`: return vertices adjacent to v.
  - `int V()`: number of vertices.
  - `int E()`: number of edges.

Example of how to use the Graph API to process the graph

```
public static int degree(Graph g, int v){
    int count = 0;
    for(int w : g.adj(v))
        count++;
    return count;
}
```

Graph density

- In a simple graph (no parallel edges or loops), if $|V| = n$, then:
  - minimum number of edges is 0 and
  - maximum number of edges is $n(n-1)/2$.
- Dense graph -> edges closer to maximum.
- Sparse graph -> edges closer to minimum.

Graph representation: adjacency matrix

- Maintain a $|V|$-by-$|V|$ boolean array; for each edge `v-w`:
  - `adj[v][w] = adj[w][v] = true;`
- Good for dense graphs (edges close to $|V|^2$).
- Constant time for lookup of an edge.
- Constant time for adding an edge.
- $|V|$ time for iterating over vertices adjacent to v.
- Symmetric, therefore wastes space in undirected graphs ($|V|^2$).
- Not widely used in practice.

	A	**B**	**C**	**D**
A	0	1	1	1
B	1	0	0	1
C	1	0	0	0
D	1	1	0	0

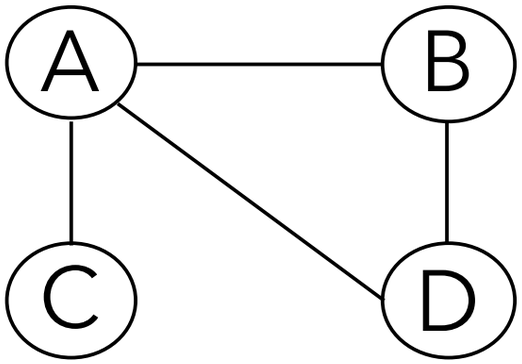

Graph representation: adjacency list

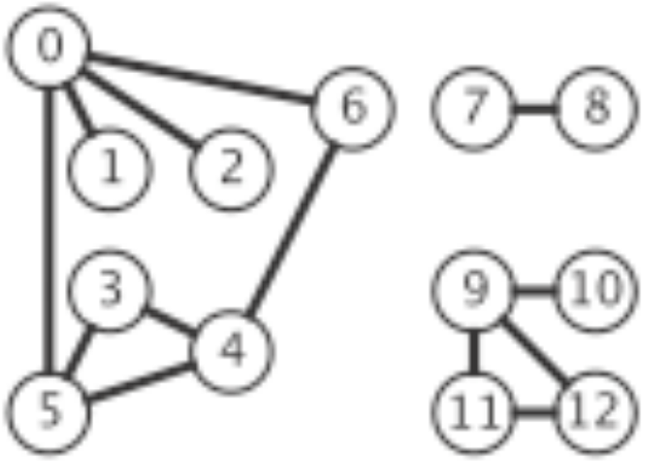

- Maintain vertex-indexed array of lists.
- Good for sparse graphs (edges proportional to $|V|$) which are much more common in the real world.
- Algorithms based on iterating over vertices adjacent to v.
- Space efficient ($|E| + |V|$).
- Constant time for adding an edge.
- Lookup of an edge or iterating over vertices adjacent to v is $degree(v)$.

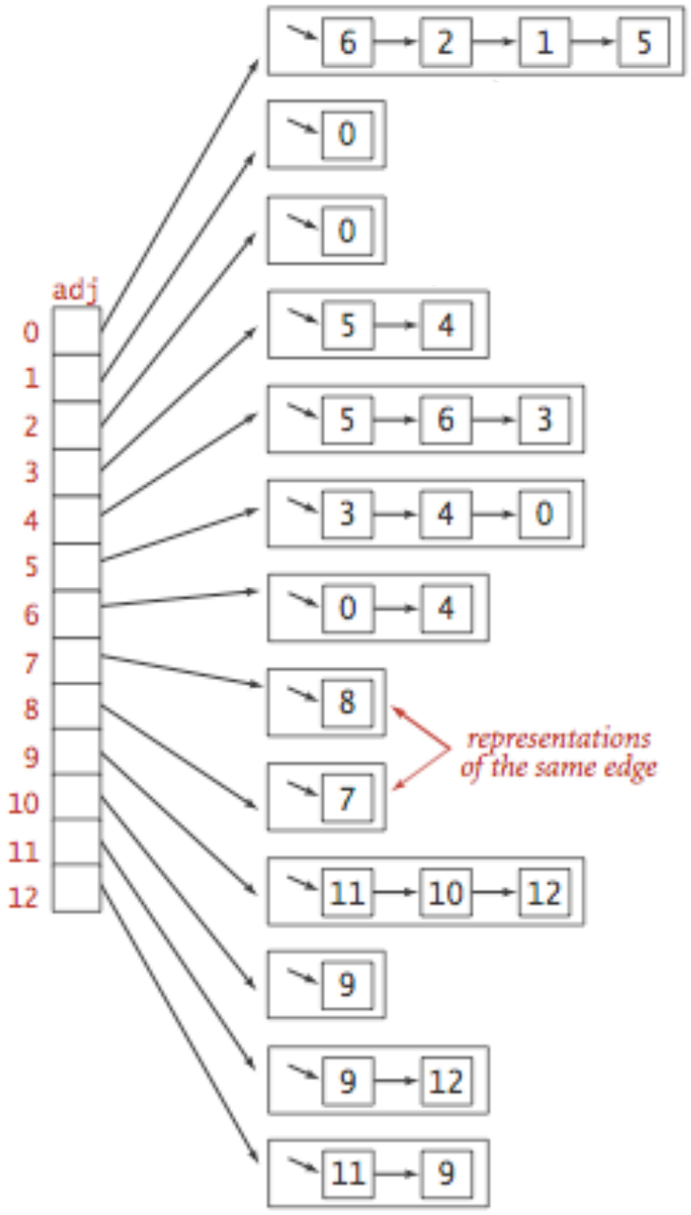

Adjacency-list graph representation in Java

```
public class Graph {

    private final int V;
    private int E;
    private ArrayList<ArrayList<Integer>> adj;

    //Initializes an empty graph with V vertices and 0 edges.
    public Graph(int V) {
        this.V = V;
        this.E = 0;
        adj = new ArrayList<ArrayList<Integer>>(V);
        for (int v = 0; v < V; v++) {
            adj.add(new ArrayList<Integer>());
        }
    }

    //Adds the undirected edge v-w to this graph. Parallel edges and self-loops allowed
    public void addEdge(int v, int w) {
        E++;
        adj.get(v).add(w);
        adj.get(w).add(v);
    }


    //Returns the vertices adjacent to vertex v.
    public Iterable<Integer> adj(int v) {
       return adj.get(v);
    }
```

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Some slides adopted from Algorithms 4th Edition or COS226

Mazes as graphs

- Vertex = intersection; edge = passage

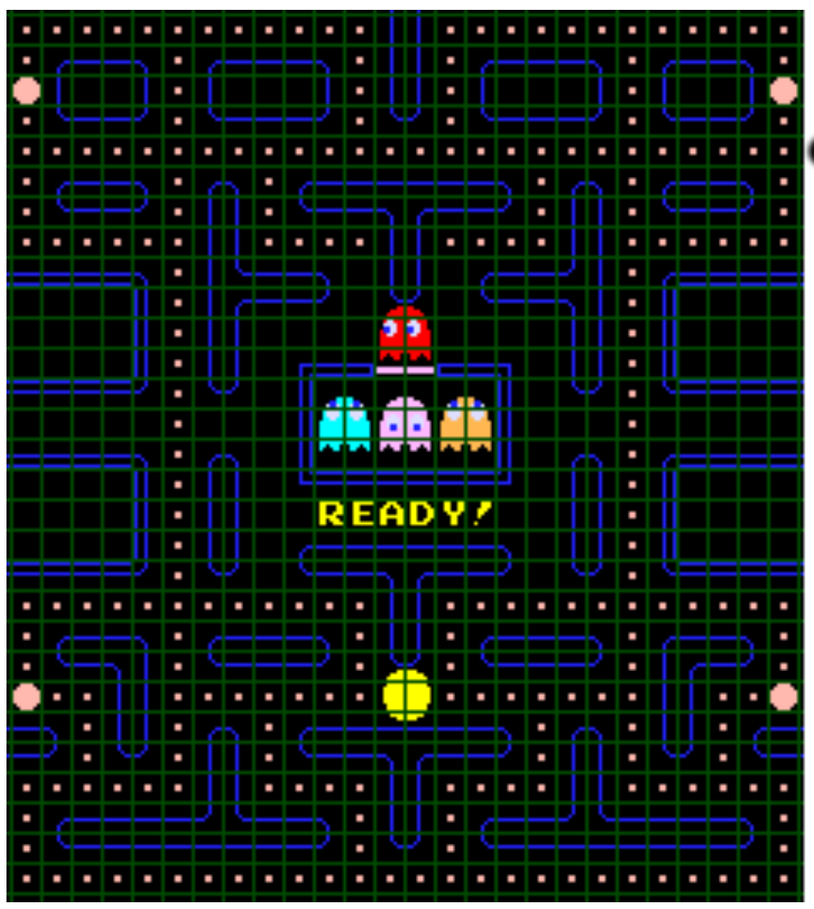

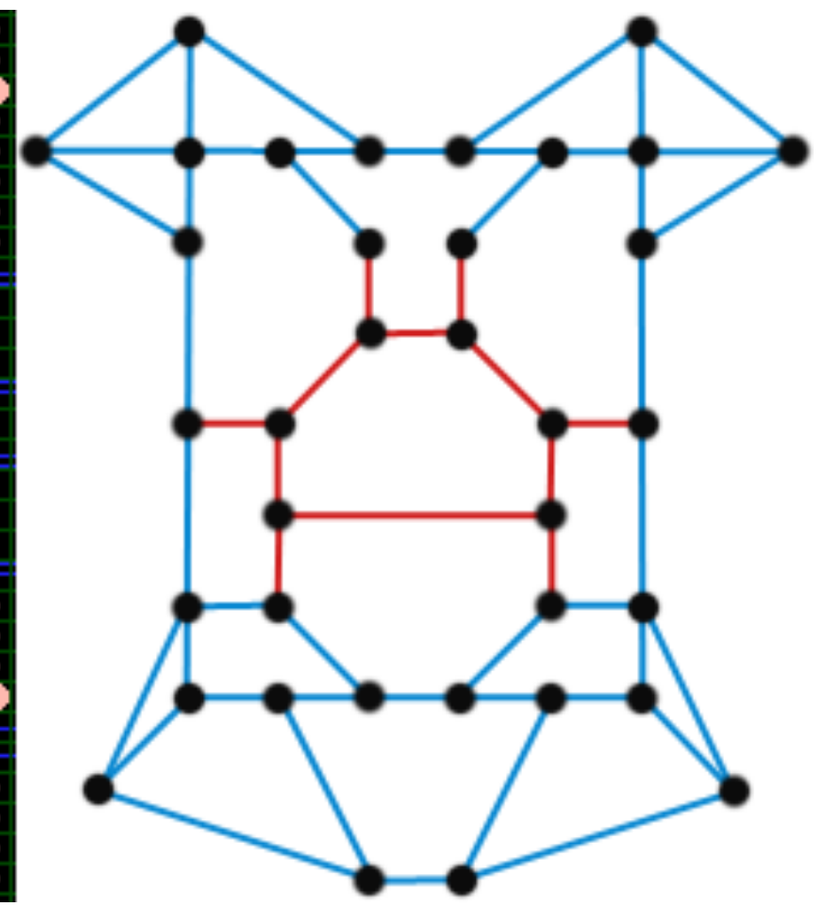

http://oatzy.blogspot.com/2011/09/playing-with-pac-man.html

How to survive a maze: a lesson from a Greek myth

- Theseus escaped from the labyrinth after killing the Minotaur with the following strategy instructed by Ariadne:
  - Unroll a ball of string behind you.
  - Mark each newly discovered intersection and passage.
  - Retrace steps when no unmarked options.
- Also known as the Trémaux algorithm.

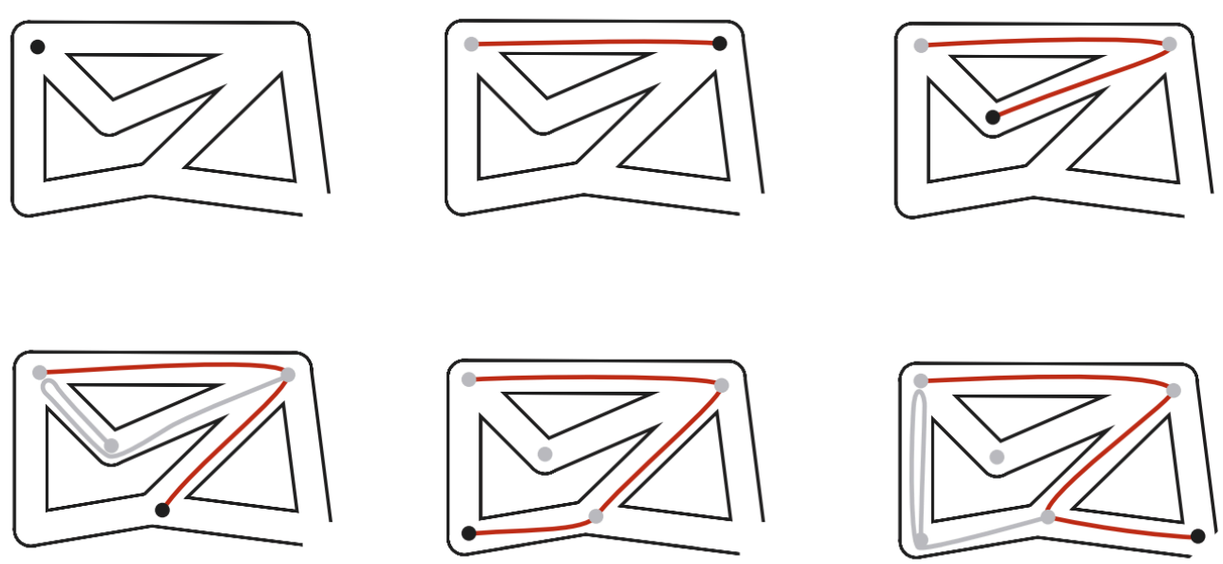

Depth-first search

- Goal: Systematically traverse a graph.
- DFS (to visit a vertex v)
  - Mark vertex v.
  - Recursively visit all unmarked vertices w adjacent to v.
- Typical applications:
  - Find all vertices connected to a given vertex.
  - Find a path between two vertices.

http://algs4.cs.princeton.edu

4.1 DEPTH-FIRST SEARCH DEMO

Recursive depth-first search

- Goal: Find all vertices connected to s (and a corresponding path).
- Idea: Mimic maze exploration.
- Algorithm:
  - Use recursion (ball of string).
  - Mark each visited vertex (and keep track of edge taken to visit it).
  - Return (retrace steps) when no unvisited options.

- When started at vertex s, DFS marks all vertices connected to s (and no other).

Recursive implementation of depth-first search in Java

```
public class DepthFirstSearch {
     private boolean[] marked;     // marked[v] = is there an s-v path?
     private int[] edgeTo;         // edgeTo[v] = previous vertex on path from s to v

    public DepthFirstSearch(Graph G, int s) {
        marked = new boolean[G.V()];
        edgeTo = new int[G.V()];
        dfs(G, s);
    }

    // depth first search from v
    private void dfs(Graph G, int v) {
        marked[v] = true;
        for (int w : G.adj(v)) {
            if (!marked[w]) {
                edgeTo[w] = v;
                dfs(G, w);
            }
        }
    }
```

PRACTICE TIME

- Run recursive DFS on the following graph starting at vertex 0 and return the vertices in the order of being marked. Assume that the adj method returns back the adjacent vertices in increasing numerical order.

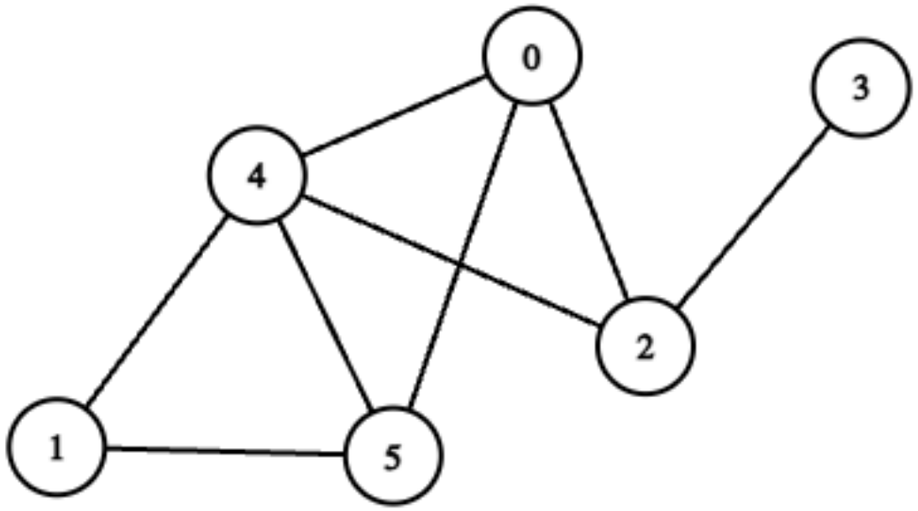

ANSWER

- Vertices marked as visited: 0, 2, 3, 4, 1, 5

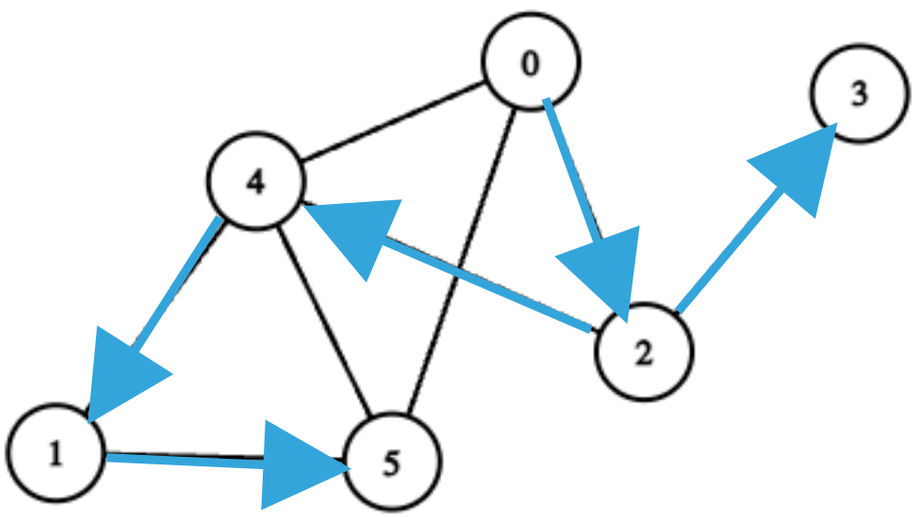

V	marked	edgeTo
0	T	-
1	T	4
2	T	0
3	T	2
4	T	2
5	T	1

Iterative depth-first search

- We can also implement depth-first search with an explicit stack instead of recursion. Such an implementation would explore adjacent vertices in the reverse order of the standard recursive DFS

Alternative iterative implementation with a stack

```
public class IterativeDFS {
   private boolean[] marked;     // marked[v] = is there an s->v path?
   private int[] edgeTo;     // edgeTo[v] = previous vertex on path from s to v

   public IterativeDFS(Graph G, int s) {
        marked = new boolean[G.V()];
        edgeTo = new int[G.V()];
        dfs(G, s);
    }

   // iterative dfs that uses a stack
   private void dfs(Graph G, int v) {
       Stack stack = new Stack();
       stack.push(v);
       while (!stack.isEmpty()) {
           int vertex = stack.pop();
           if (!marked[vertex]) {
               marked[vertex] = true;
               for (int w : G.adj(vertex)) {
                   if (!marked[w]) {
                       edgeTo[w] = vertex;
                       stack.push(w);
                   }
               }
           }
       }
   }
```

PRACTICE TIME

- Run the iterative DFS that uses a stack on the following graph starting at vertex 0 and return the vertices in the order of being marked. Assume that the adj method returns back the adjacent vertices in increasing numerical order.

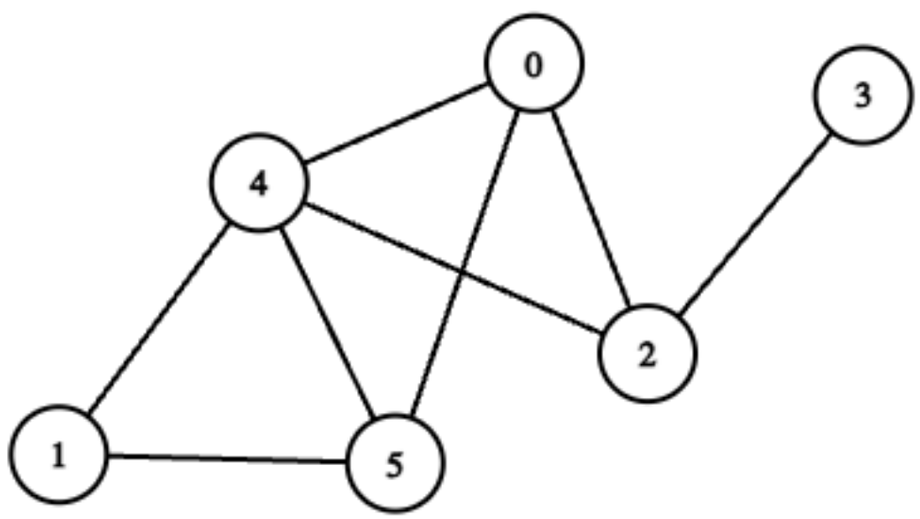

ANSWER

- Vertices marked as visited: 0, 5, 4, 2, 3, 1

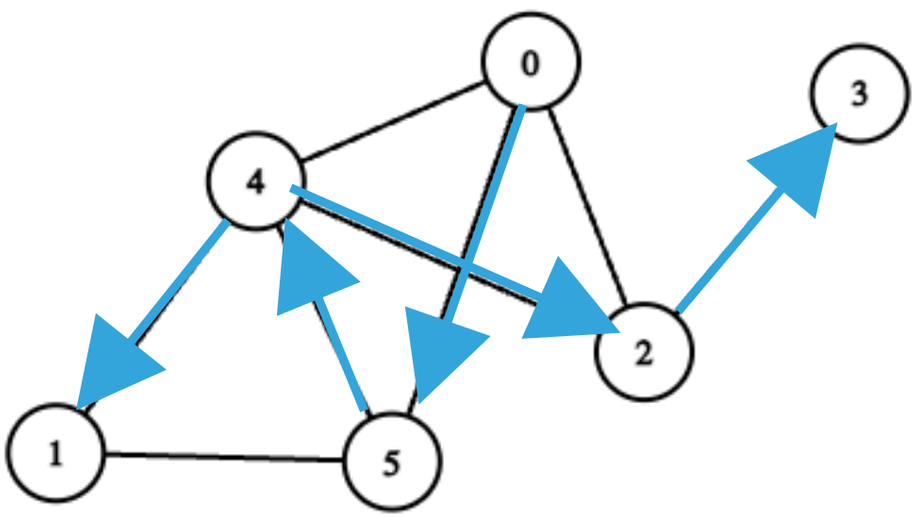

V	marked	edgeTo
0	T	-
1	T	4
2	T	4
3	T	2
4	T	5
5	T	0

ANSWER

- Vertices marked as visited in recursive DFS: 0, 2, 3, 4, 1, 5
- Vertices marked as visited in iterative DFS: 0, 5, 4, 2, 3, 1

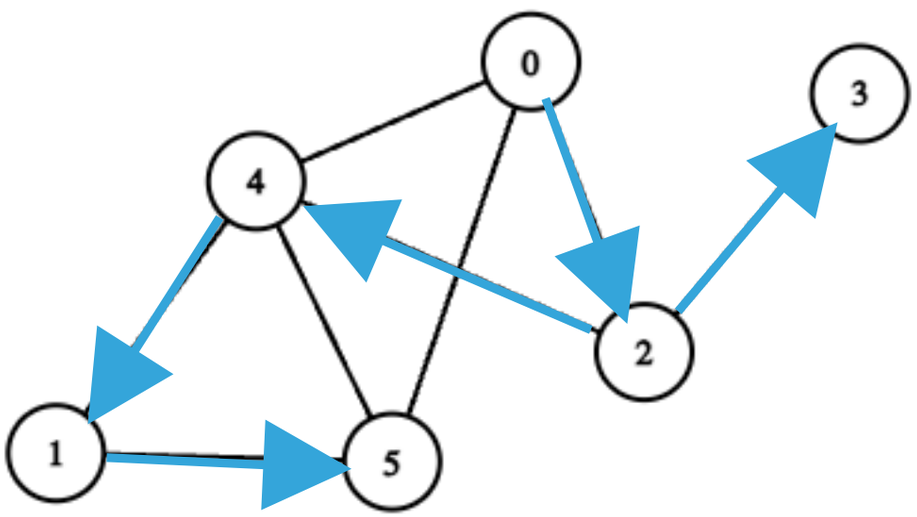

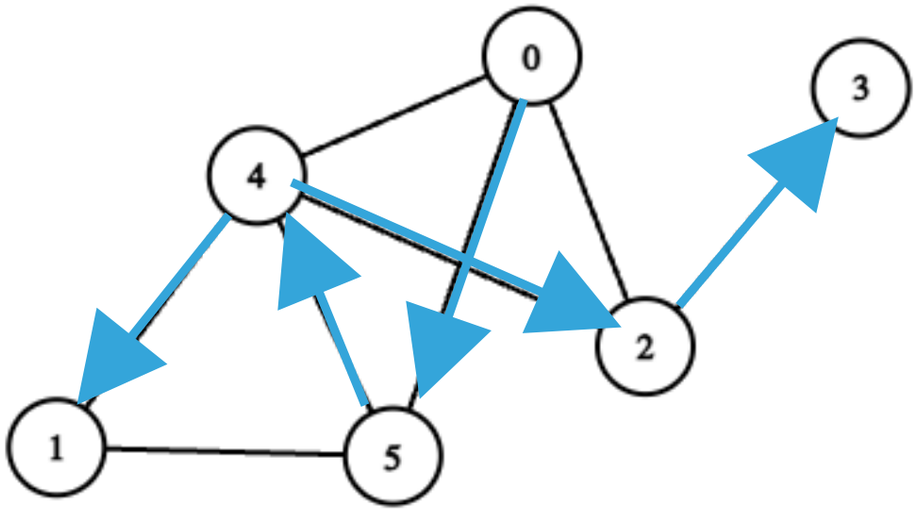

- Recursive DFS

Iterative DFS

Depth-first search analysis

- DFS marks all vertices connected to s in time proportional to $|V| + |E|$ in the worst case.
  - Initializing arrays marked and edgeTo takes time proportional to $|V|$.
  - Each adjacency-list entry is examined exactly once and there are $2|E|$ such entries (two for each edge).
- Once we run DFS, we can check if vertex v is connected to s in constant time. We can also find the v-s path (if it exists) in time proportional to its length.

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Breadth-first search

- BFS (from source vertex s)
  - Put s on a queue and mark it as visited.
  - Repeat until the queue is empty:
    - Dequeue vertex v.
    - Enqueue each of v's unmarked neighbors and mark them.

- Basic idea: BFS traverses vertices in order of distance from s.

http://algs4.cs.princeton.edu

4.1 BREADTH-FIRST SEARCH DEMO

Breadth-first search in Java

```
public class BreadthFirstSearch {
   private boolean[] marked;  // marked[v] = is there an s-v path
    private int[] edgeTo;      // edgeTo[v] = previous edge on shortest s-v path
    private int[] distTo;      // distTo[v] = number of edges shortest s-v path

    public BreadthFirstSearch(Graph G, int s) {
        marked = new boolean[G.V()];
        distTo = new int[G.V()];
        edgeTo = new int[G.V()];
        bfs(G, s);
    }

    private void bfs(Graph G, int s) {
        Queue<Integer> q = new Queue<Integer>();
        distTo[s] = 0;
        marked[s] = true;
        q.enqueue(s);

        while (!q.isEmpty()) {
            int v = q.dequeue();
            for (int w : G.adj(v)) {
                if (!marked[w]) {
                    edgeTo[w] = v;
                    distTo[w] = distTo[v] + 1;
                    marked[w] = true;
                    q.enqueue(w);
                }
            }
        }
    }
```

PRACTICE TIME

- Run the BFS on the following graph starting at vertex 0 and return the vertices in the order of being marked. Assume that the adj method returns back the adjacent vertices in increasing numerical order.

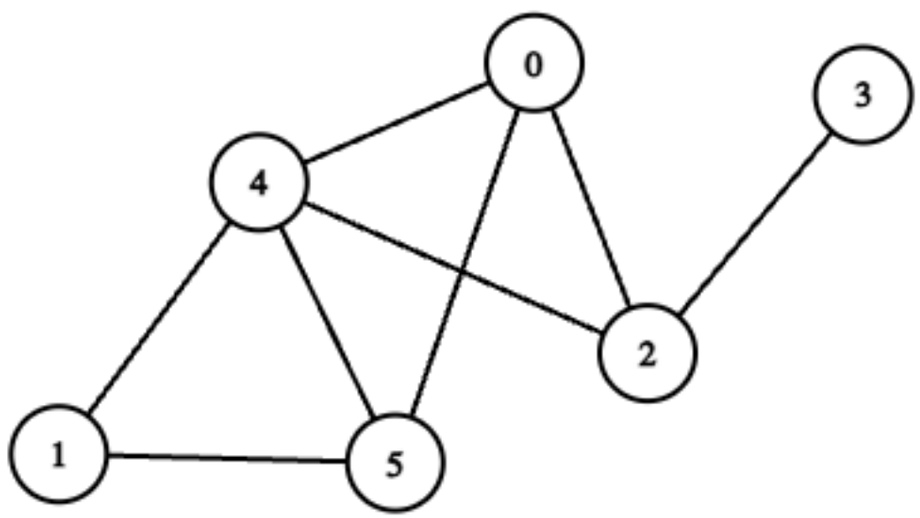

ANSWER

- Vertices marked as visited: 0, 2, 4, 5, 3, 1

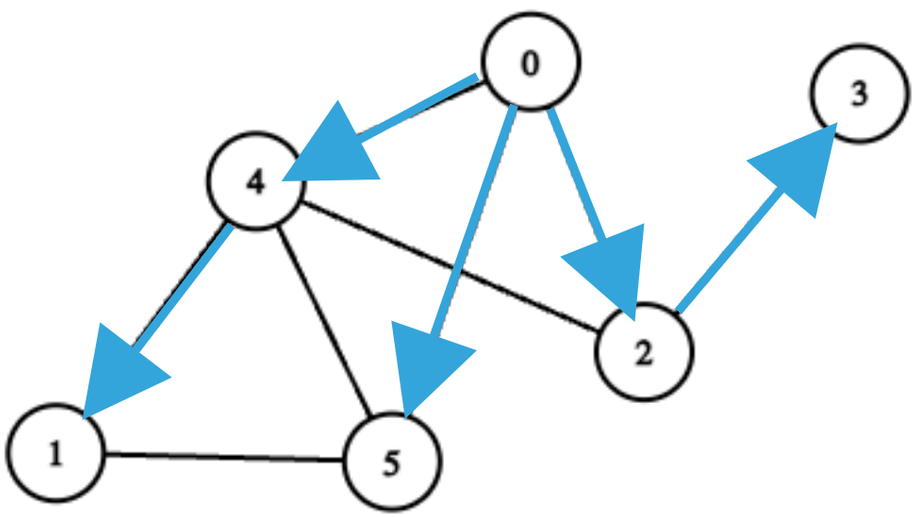

V	marked	edgeTo	distTo
0	T	-	0
1	T	4	2
2	T	0	1
3	T	2	2
4	T	0	1
5	T	0	1

Summary

- DFS: Put unvisited vertices on a stack.
- BFS: Put unvisited vertices on a queue.
- Shortest path problem: Find path from s to t that uses the fewest number of edges.
  - E.g., calculate the fewest numbers of hops in a communication network.
  - E.g., calculate the Kevin Bacon number or Erdös number.
- BFS computes shortest paths from s to all vertices in a graph in time proportional to $|E| + |V|$
  - The queue always consists of zero or more vertices of distance k from s, followed by zero or more vertices of k+1.

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

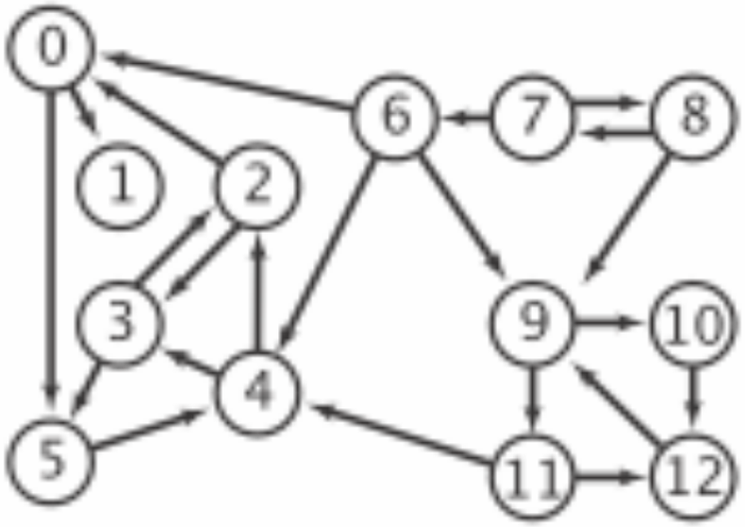

Directed Graph Terminology

- Directed Graph (digraph) : a set of vertices V connected pairwise by a set of directed edges E.
  - E.g., V = {0,1,2,3,4,5,6,7,8,9,10,11,12},
    E = {{0,1}, {0,5}, {2,0}, {2,3},{3,2},{3,5},{4,2},{4,3},{5,4},{6,0},{6,4},{6,9},{7,6}{7,8},{8,7},{8,9},
    {9,10},{9,11},{10,12},{11,4},{11,12},{12,9}}.
- Directed path: a sequence of vertices in which there is a directed edge pointing from each vertex in the sequence to its successor in the sequence, with no repeated edges.
  - A simple directed path is a directed path with no repeated vertices.
- Directed cycle: Directed path with at least one edge whose first and last vertices are the same.
  - A simple directed cycle is a directed cycle with no repeated vertices (other than the first and last).
- The length of a cycle or a path is its number of edges.

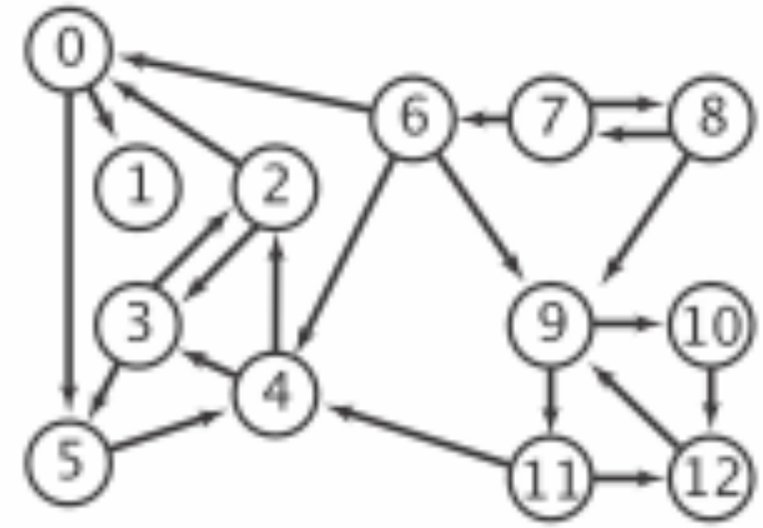

Directed Graph Terminology

- Self-loop: an edge that connects a vertex to itself.
- Two edges are parallel if they connect the same pair of vertices.
- The outdegree of a vertex is the number of edges pointing from it.
- The indegree of a vertex is the number of edges pointing to it.
- A vertex w is reachable from a vertex v if there is a directed path from v to w.
- Two vertices v and w are strongly connected if they are mutually reachable.

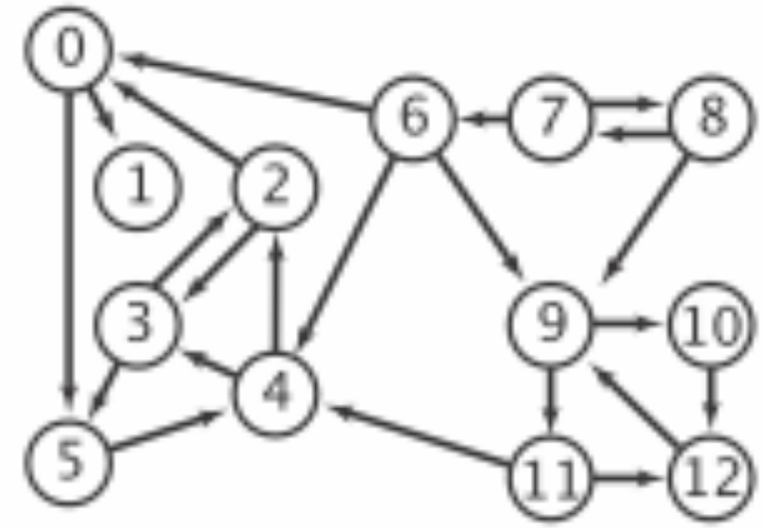

Directed Graph Terminology

- A digraph is strongly connected if there is a directed path from every vertex to every other vertex.
- A digraph that is not strongly connected consists of a set of strongly connected components, which are maximal strongly connected subgraphs.
- A directed acyclic graph (DAG) is a digraph with no directed cycles.

Anatomy of a digraph

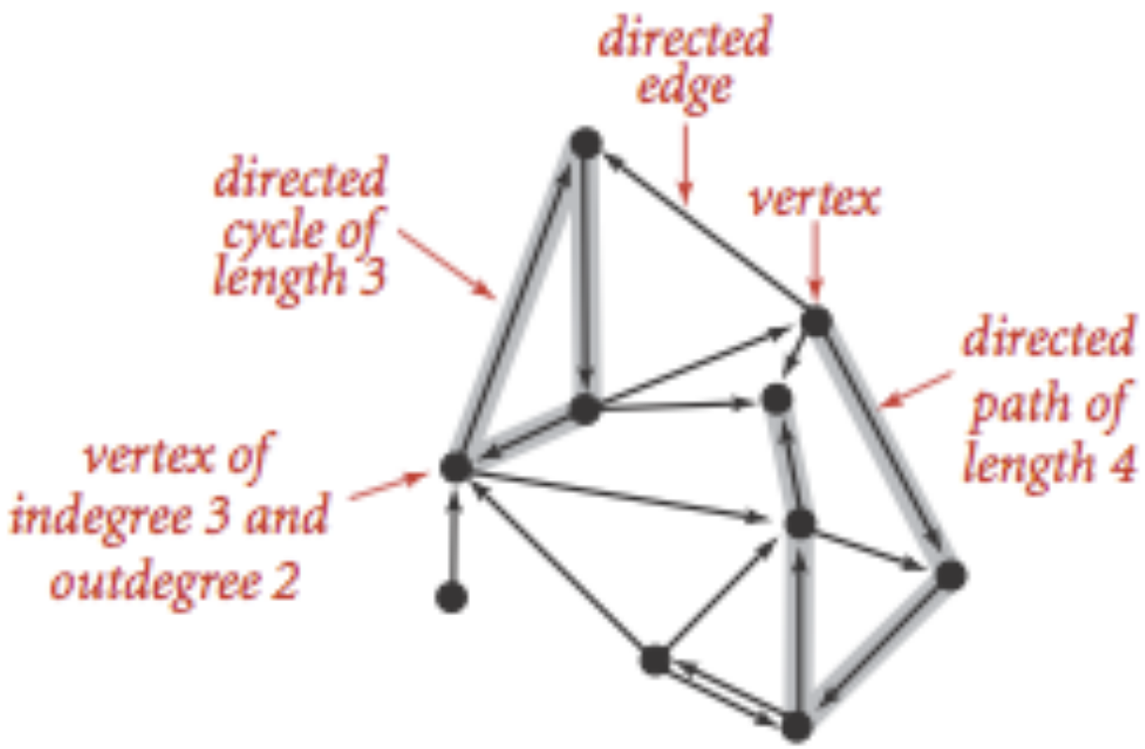

Anatomy of a digraph

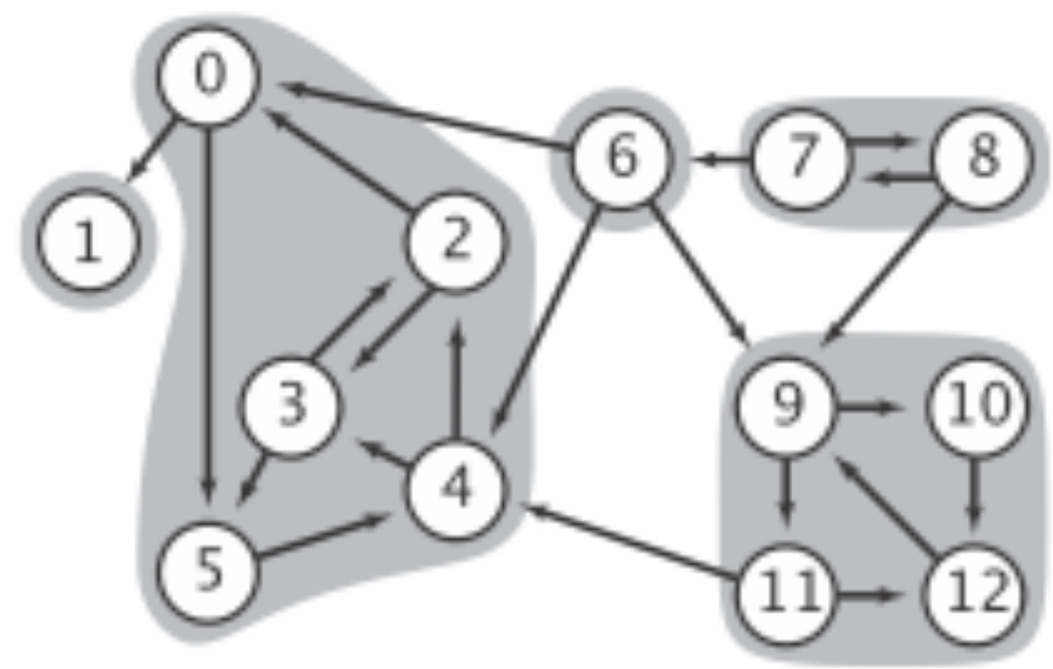

A digraph and its strong components

Digraph Applications

Digraph	Vertex	Edge
Web	Web page	Link
Cell phone	Person	Placed call
Financial	Bank	Transaction
Transportation	Intersection	One-way street
Game	Board	Legal move
Citation	Article	Citation
Infectious Diseases	Person	Infection
Food web	Species	Predator-prey relationship

Popular digraph problems

Problem	Description
s->t path	Is there a path from s to t?
Shortest s->t path	What is the shortest path from s to t?
Directed cycle	Is there a directed cycle in the digraph?
Topological sort	Can vertices be sorted so all edges point from earlier to later vertices?
Strong connectivity	Is there a directed path between every pair of vertices?

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Basic Graph API

- `public class Digraph`
  - `Digraph(int V)`: create an empty digraph with V vertices.
  - `void addEdge(int v, int w)`: add an edge v->w.
  - `Iterable<Integer> adj(int v)`: return vertices adjacent from v.
  - `int V()`: number of vertices.
  - `int E()`: number of edges.
  - `Digraph reverse()`: reverse edges of digraph.

Digraph representation: adjacency list

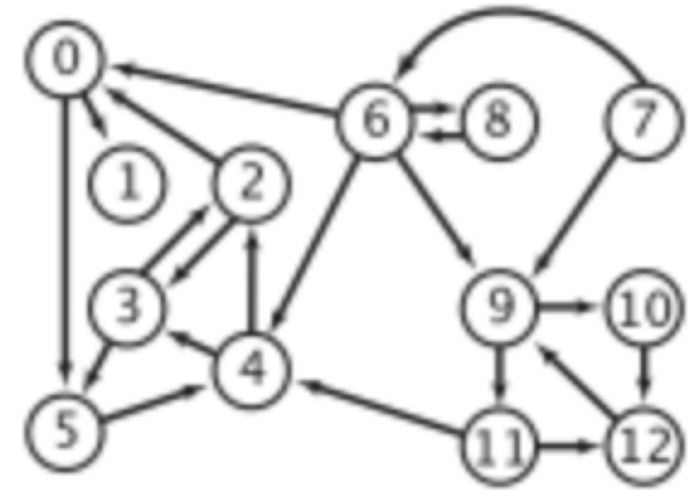

- Maintain vertex-indexed array of lists.
- Good for sparse graphs (edges proportional to $|V|$) which are much more common in the real world.
- Algorithms based on iterating over vertices adjacent from v.
- Space efficient ($|E| + |V|$).
- Constant time for adding a directed edge.
- Lookup of a directed edge or iterating over vertices adjacent from v is $outdegree(v)$.

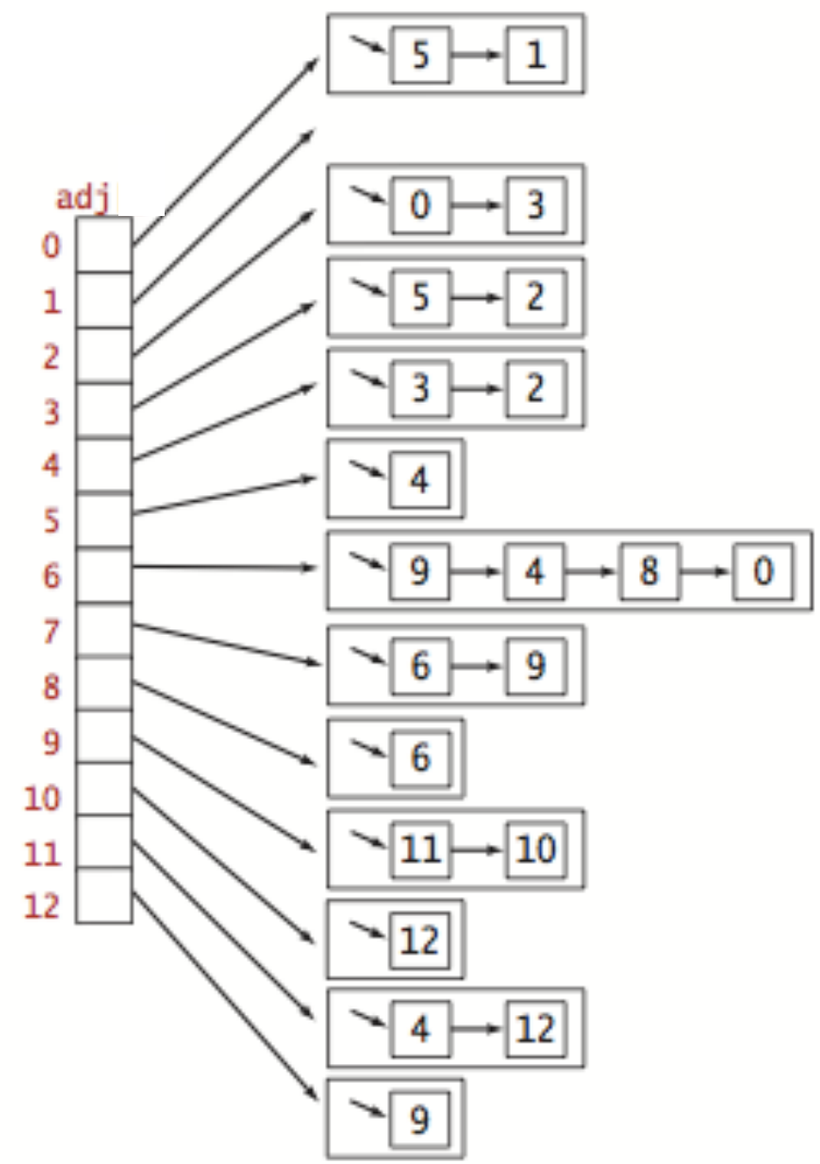

Adjacency-list digraph representation in Java

```
public class Digraph {

    private final int V;
    private int E;
    private ArrayList<ArrayList<Integer>> adj;

    //Initializes an empty digraph with V vertices and 0 edges.
    public Digraph(int V) {
        this.V = V;
        this.E = 0;
        adj = new ArrayList<ArrayList<Integer>>(V);
        for (int v = 0; v < V; v++) {
            adj.add(new ArrayList<Integer>());
        }
    }

    //Adds the directed edge v->w to this digraph.
    public void addEdge(int v, int w) {
        E++;
        adj.get(v).add(w);
    }


    //Returns the vertices adjacent from vertex v.
    public Iterable<Integer> adj(int v) {
       return adj.get(v);
    }
```

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Reachability

- Find all vertices reachable from s along a directed path.

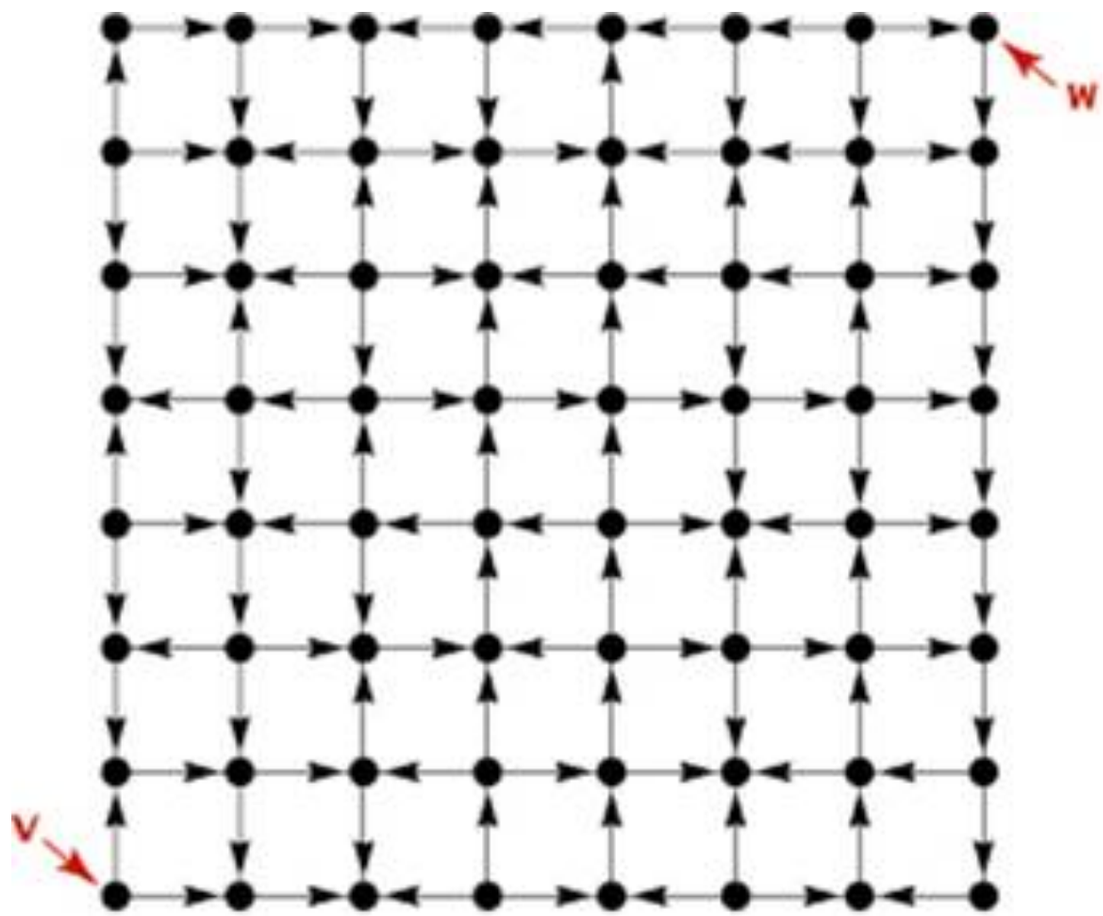

Is w reachable from v in this digraph?

https://apprize.info/science/algorithms_2/2.html

Depth-first search in digraphs

- Same method as for undirected graphs.
  - Every undirected graph is a digraph with edges in both directions.
  - Maximum number of edges in a simple digraph is $n(n-1)$.
- DFS (to visit a vertex v)
  - Mark vertex v.
  - Recursively visit all unmarked vertices w adjacent from v.
- Typical applications:
  - Find a directed path from source vertex s to a given target vertex v.
  - Topological sort.
  - Directed cycle detection.

http://algs4.cs.princeton.edu

4.2 DIRECTED DFS DEMO

Directed depth-first search in Java

```
public class DirectedDFS {
   private boolean[] marked;     // marked[v] = is there an s->v path?

   public DirectedDFS(Digraph G, int s) {
        marked = new boolean[G.V()];
        dfs(G, s);
    }

   // directed depth first search from v
   private void dfs(Digraph G, int v) {
       marked[v] = true;
       for (int w : G.adj(v)) {
           if (!marked[w]) {
               dfs(G, w);
           }
       }
   }
```

Alternative iterative implementation with a stack

```
public class DirectedDFS {
   private boolean[] marked;     // marked[v] = is there an s->v path?

   public DirectedDFS(Digraph G, int s) {
        marked = new boolean[G.V()];
        dfs(G, s);
    }

    // iterative dfs that uses a stack
    private void dfs(Digraph G, int v) {
        Stack stack = new Stack();
        s.push(v);
        while (!stack.isEmpty()) {
            int vertex = stack.pop();
            if (!marked[vertex]) {
                marked[vertex] = true;
                for (int w : G.adj(vertex)) {
                    if (!marked[w])
                        stack.push(w);
                }
            }
        }
    }
```

Depth-first search analysis

- DFS marks all vertices reachable from `s` in time proportional to $|V| + |E|$ in the worst case.
  - Initializing arrays `marked` takes time proportional to $|V|$.
  - Each adjacency-list entry is examined exactly once and there are E such edges.
- Once we run DFS, we can check if vertex `v` is reachable from `s` in constant time. We can also find the `s->v` path (if it exists) in time proportional to its length.

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Breadth-first search

- Same method as for undirected graphs.
  - Every undirected graph is a digraph with edges in both directions.
- BFS (from source vertex s)
  - Put s on queue and mark s as visited.
  - Repeat until the queue is empty:
    - Dequeue vertex v.
    - Enqueue all unmarked vertices adjacent from v, and mark them.
- Typical applications:
  - Find the shortest (in terms of number of edges) directed path between two vertices in time proportional to $|E| + |V|$.

http://algs4.cs.princeton.edu

4.2 DIRECTED BFS DEMO

Summary

- Single-source reachability in a digraph: DFS/BFS.
- Shortest path in a digraph: BFS.

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Is a digraph strongly connected?

- A strongly connected digraph is a directed graph in which it is possible to reach any vertex starting from any other vertex by traversing edges.
- Pick a random starting vertex s.
- Run DFS/BFS starting at s.
  - If have not reached all vertices, return false.
- Reverse edges.
- Run DFS/BFS again on reversed graph.
  - If have not reached all vertices, return false.
  - Else return true.

Lecture 22: Graphs

- Undirected Graphs
  - Graph API
  - Depth-First Search
  - Breadth-First Search
- Directed Graphs
  - Digraph API
  - Depth-First Search
  - Breadth-First Search
  - Strongly Connected Components

Readings:

- Recommended Textbook: Chapter 4.1 (Pages 522-556), Chapter 4.2 (Pages 566-594)
- Website:
  - https://algs4.cs.princeton.edu/41graph/
  - https://algs4.cs.princeton.edu/42digraph/

Visualization

- https://visualgo.net/en/dfsbfs

Problem 1

- What is the maximum number of edges in an undirected graph with V vertices and no parallel edges?
- What is the minimum number of edges in an undirected graph with V vertices, none of which are isolated (have degree 0)?
- What is the maximum number of edges in a digraph with V vertices and no parallel edges?
- What is the minimum number of edges in a digraph with V vertices, none of which are isolated?

Problem 2

- Assume you are given the following 16 edges of an undirected graph with 12 vertices, inserted in an adjacency list in this order:

- 8-4
- 2-3
- 1-11
- 0-6
- 3-6
- 10-3
- 7-11
- 7-8
- ...
- 11-8
- 2-0
- 6-2
- 5-2
- 5-10
- 5-0
- 8-1
- 4-1

Problem 3

- Run DFS (both recursive and iterative) and BFS on the following digraph starting at vertex 0.

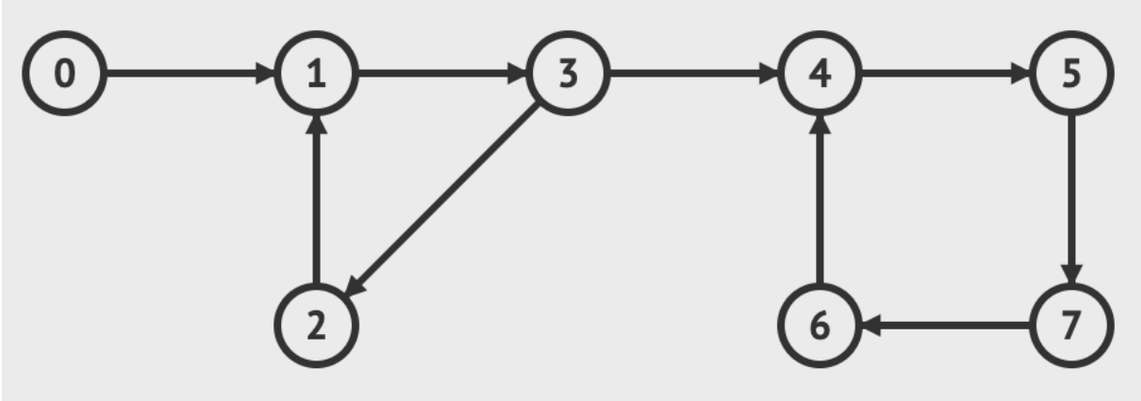

Answer 1

- What is the maximum number of edges in an undirected graph with V vertices and no parallel edges?
  - $n(n-1)/2$, where $n = |V|$.
- What is the minimum number of edges in an undirected graph with V vertices, none of which are isolated (have degree 0)?
  - $n-1$.
- What is the maximum number of edges in a digraph with V vertices and no parallel edges?
  - $n(n-1)$, where $n = |V|$.
- What is the minimum number of edges in a digraph with V vertices, none of which are isolated?
  - $n-1$.

Answer 2

- Assume you are given the following 16 edges of an undirected graph with 12 vertices, inserted in an adjacency list in this order:

- 8-4
- 2-3
- 1-11
- 0-6
- 3-6
- 10-3
- 7-11
- 7-8
- ...

- 11-8
- 2-0
- 6-2
- 5-2
- 5-10
- 5-0
- 8-1
- 4-1

- 0 -> 5 -> 2 -> 6
- 1 -> 4 -> 8 -> 11
- 2 -> 5 -> 6 -> 0 -> 3
- 3 -> 10 -> 6 -> 2
- 4 -> 1 -> 8
- 5 -> 0 -> 10 -> 2
- 6 -> 2 -> 3 -> 0
- 7 -> 8 -> 11
- 8 -> 1 -> 11 -> 7 -> 4
- 9 ->
- 10 -> 5 -> 3
- 11 -> 8 -> 7 -> 1

Answer 3

- Recursive DFS - Order of visit: 0, 1, 3, 2, 4, 5, 6, 7

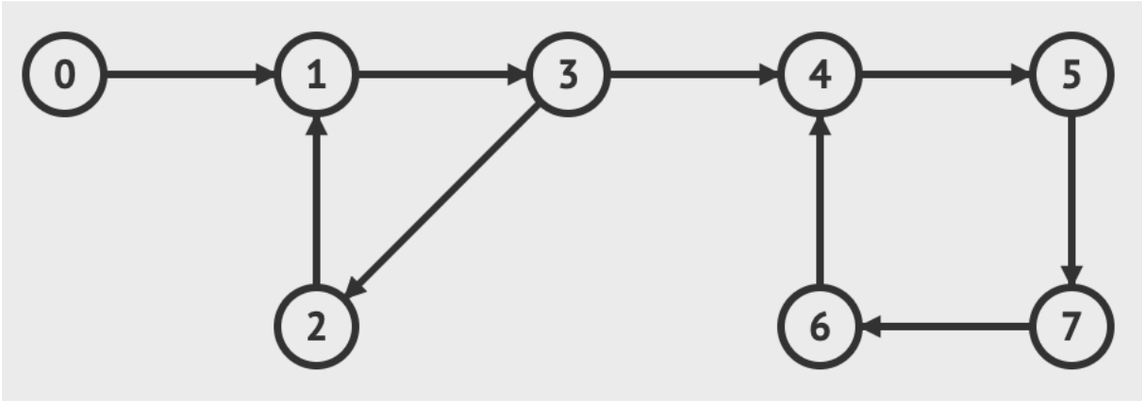

V	marked	edgeTo
0	T	-
1	T	0
2	T	3
3	T	1
4	T	3
5	T	4
6	T	7
7	T	5

Answer 3

- Iterative DFS - Order of visit: 0, 1, 3, 4, 5, 7, 6, 2

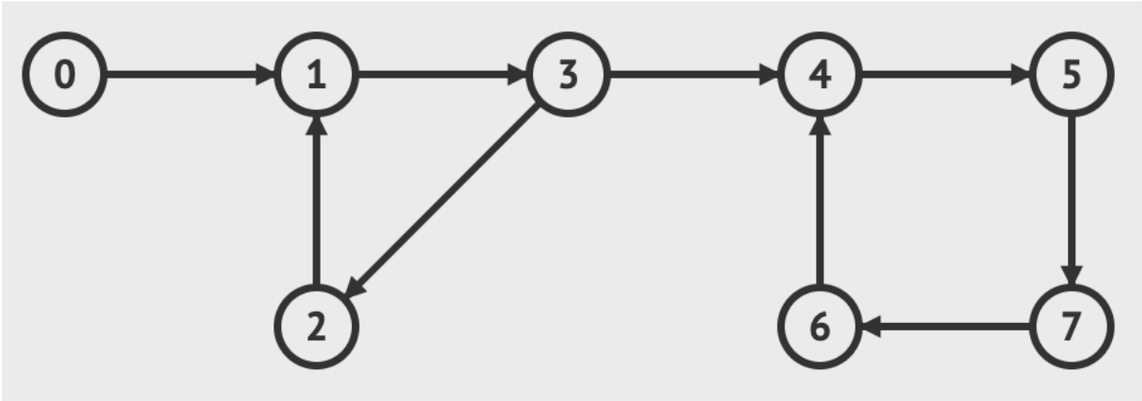

V	marked	edgeTo
0	T	-
1	T	0
2	T	3
3	T	1
4	T	3
5	T	4
6	T	7
7	T	5

Answer 3

- BFS - Order of visit: 0, 1, 3, 2 4, 5, 7, 6

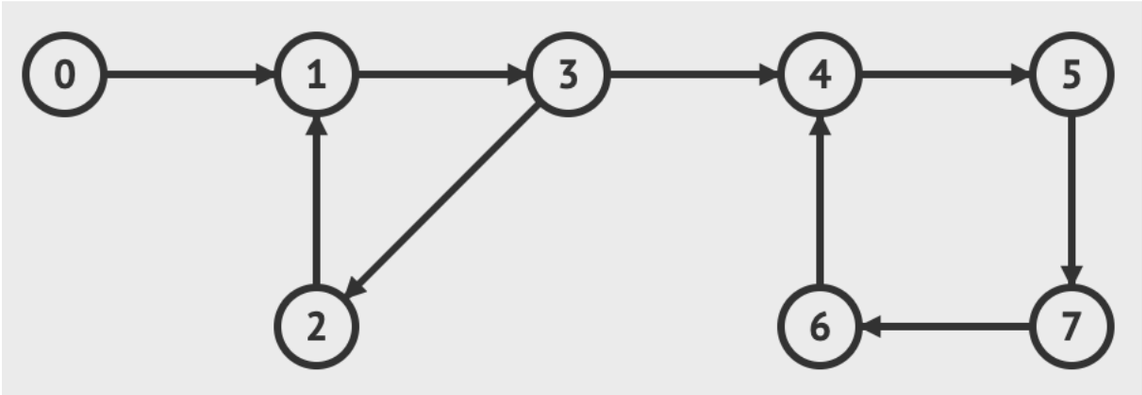

V	marked	edgeTo	distTo
0	T	-	0
1	T	1	1
2	T	3	2
3	T	1	2
4	T	3	3
5	T	4	4
6	T	7	6
7	T	5	5